


Quectel EG800Q Series

IoT/M2M-optimized LTE Cat 1 bis Module

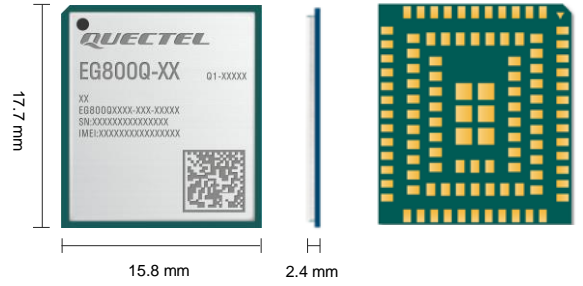

Quectel EG800Q is a series of LTE Cat 1 bis module optimized specially for M2M and IoT applications. Adopting the 3GPP Rel-14 LTE technology and supporting Cat 1 bis, it delivers maximum data rates up to 10 Mbps downlink and 5 Mbps uplink. Designed in a compact and unified form factor.

EG800Q series contains 2 variants: EG800Q-EU and EG800Q-NA. A rich set of Internet protocols, industry-standard interfaces and abundant functionalities (USB serial drivers for Windows 8.1/ 10/ 11, Linux and Android) extend the applicability of the module to a wide range of M2M and IoT applications, such as asset management, commercial telematics, payment, RMAC (Remotely Managed Access Control), smart safety and automation, smart metering and smart grid.



Key Features

- ✓ LTE Cat 1 bis module optimized for M2M and IoT applications
- ✓ LTE-FDD coverage
- ✓ Supports DFOTA
- ✓ Single antenna
- ✓ LTE module in compact size
- ✓ Supports Wi-Fi Scan



LTE Cat 1 bis
Max. 10 Mbps (DL)
Max. 5 Mbps (UL)



Compact Size



LGA Package




Embedded Abundant
Protocols



DFOTA



Quectel Enhanced
AT Commands



USB 2.0 High Speed
Interface

Quectel EG800Q

LTE Cat 1 bis	EG800Q-EU	EG800Q-NA
Region/ Operator	Europe	North America
Dimensions (mm)	17.7 × 15.8 × 2.4	17.7 × 15.8 × 2.4
Weight (g)	Approx. 2.0	Approx. 2.0
Package	LGA	LGA
Temperature Range		
Operating Temperature	-35 °C to +75 °C	-35 °C to +75 °C
Extended Temperature	-40 °C to +85 °C	-40 °C to +85 °C
Frequency Bands		
LTE-FDD	B1/ 3/ 5/ 7/ 8/ 20/ 28	B2/ 4/ 5/ 12/ 13/ 66
Certifications		
Carrier	Europe: Deutsche Telekom New Zealand: Spark*	America: Verizon ^① / AT&T ^① / T-Mobile ^①
Regulatory	Europe: CE The UK: UKCA Brazil: Anatel* Australia/ New Zealand: RCM	Global: GCF North America: PTCRB America: FCC Canada: IC
Others	WHQL	WHQL
Max. Data Rates		
LTE-FDD (Mbps)	10 (DL)/ 5 (UL)	10 (DL)/ 5 (UL)
Interfaces		
USB 2.0	× 1	× 1
Digital Audio (PCM)*	× 1	× 1
USIM	× 1	× 1
NET_STATUS	× 1	× 1
UART	× 3 (Main, Debug and Auxiliary UART*)	× 3 (Main, Debug and Auxiliary UART*)
ADC	× 2	× 2
RESET_N	× 1	× 1
PWRKEY	× 1	× 1
I2C	× 1	× 1
USB_BOOT	× 1	× 1
Antenna	× 1 (Main Antenna)	× 1 (Main Antenna)
Software Features		
Protocols	TCP/ UDP/ NTP/ NITZ/ FTP/ HTTP/ PING/ HTTPS/ FTPS/ SSL/ MQTT/ CMUX/ PPP/ FILE/ SMTP/ SMTPS/ MMS*	TCP/ UDP/ NTP/ NITZ/ FTP/ HTTP/ PING/ HTTPS/ FTPS/ SSL/ MQTT/ CMUX/ PPP/ FILE/ SMTP/ SMTPS/ MMS*
USB Serial Driver	Windows 8.1/ 10/ 11 Linux 2.6–6.7 Android 4.x–13.x	Windows 8.1/ 10/ 11 Linux 2.6–6.7 Android 4.x–13.x
RIL Driver	Android 4.x–13.x	Android 4.x–13.x
USB RNDIS Driver	Windows 8.1/ 10/ 11 Linux 2.6–6.7	Windows 8.1/ 10/ 11 Linux 2.6–6.7
USB ECM Driver	Linux 2.6–6.7	Linux 2.6–6.7
Enhanced Features		
DFOTA	●	●
Wi-Fi Scan	●	●
USIM Card Detection	●	●
Electrical Features		
Supply Voltage Range	3.3–4.3 V, typ. 3.8 V	3.3–4.3 V, typ. 3.8 V
Power Consumption (Typ.)	55 µA @ Power off Mode 0.06 mA @ Sleep Mode (AT+CFUN = 0, USB disconnected) 0.15 mA @ Sleep Mode (AT+CFUN = 4, USB disconnected) 4.50 mA @ Idle Mode (PF = 64, USB disconnected) 25.50 mA @ Idle Mode (PF = 64, USB connected)	50 µA @ Power off Mode 0.06 mA @ Sleep Mode (AT+CFUN = 0, USB disconnected) 0.15 mA @ Sleep Mode (AT+CFUN = 4, USB disconnected) 4.50 mA @ Idle Mode (PF = 64, USB disconnected) 25.00 mA @ Idle Mode (PF = 64, USB connected)

NOTE:

- *: Under development.
- : Supported.
- ① Verizon/ AT&T/ T-Mobile certificates are to be determined and can be started upon request