



Antenna Datasheet

Product OC: YWL00A0AA

Version: 2.1

Date: 2023-08-04

Status: Released

Product Name: 4G + 4G 2IN 1 Combo Antenna

Key Features: 4G + 4G DIV

Frequency Band: 4G: 700–960 MHz; 1710–2690 MHz

4G DIV: 700–960MHz; 1710–2690 MHz

Dimensions: Φ 81 × 14.5 mm

Efficiency: Up to 51.56 % (Free Space)

RoHS Compliant

IP66

Overview

To meet customers' requirements for the high performance, high integration, and integrated appearance of their products, Quectel provides a combined antenna box series. The antenna box can integrate a variety of antennas, such as 5G, 4G, GNSS, Wi-Fi antennas, to achieve communication functions of 5G MIMO, 4G, GNSS, and Wi-Fi. These antenna boxes can be mounted on the surface of devices via screw, adhesive or other methods, supports multiple connector types and cable lengths. It is a more flexible and reliable high-performance antenna solution for outdoor applications.

Contents

Overview	1
Contents	2
1 Specification	3
1.1. Electrical.....	3
1.1.1. 4G.....	4
1.1.2. 4G DIV.....	5
1.2. Mechanical & Environmental	6
2 Drawing	7
3 Detailed Performance	8
3.1. S-Parameter Test	8
3.1.1. VSWR.....	8
3.1.2. Return Loss	10
3.1.3. Isolation	12
3.2. Radiation Performance Test.....	13
3.2.1. Efficiency	13
3.2.2. Average Gain	15
3.2.3. Peak Gain.....	17
3.2.4. 3D & 2D Radiation Pattern.....	19
3.2.4.1. Test Status: Free Space	19
3.2.4.2. Test Status: On 300 × 300 mm Metal Plane	26
4 Packaging	33
Contact Us	35
Legal Notices	36
Revision History	38

1 Specification

Test Condition: In Free Space & On 300 × 300 mm Metal Plane

1.1. Electrical

Electrical Specifications		
Frequency Range	4G	700–960 MHz, 1710–2690 MHz
	4G DIV	700–960 MHz, 1710–2690 MHz
Radiation Pattern		Omni-directional
Polarization		Linear
Impedance		50 Ω
Isolation		≤ -9.8 dB

1.1.1. 4G

Electrical - Detail													
SPEC	Band	Band	B71	B12 /B13 /B28	B5 /B8 /B26	N74 /N75 /N76	B1 /B2 /B3	B40	Wi-Fi 2G	B38 /B41	B42 /B48 /N77	N79	Wi-Fi 5G
	Freq. (MHz)	600– 700	700– 810	820– 960	1420– 1520	1700– 2170	2300– 2400	2400– 2500	2500– 2690	3300– 4200	4400– 5000	5150– 5850	
Max. VSWR	MP	-	2.5	3.6	-	2.9	2.7	2.6	2.6	-	-	-	
	FS	-	1.7	3.0	-	1.7	1.9	1.9	2.2	-	-	-	
Max. Return Loss (dB)	MP	-	-7.2	-4.9	-	-6.2	-6.8	-7.0	-7.0	-	-	-	
	FS	-	-11.8	-6.0	-	-11.6	-10.2	-10.4	-8.6	-	-	-	
AVG Eff. (%)	MP	-	28.5	34.2	-	23.8	10.6	10.8	11.5	-	-	-	
	FS	-	33.3	44.1	-	35.9	31.9	28.5	30.4	-	-	-	
AVG Gain (dB)	MP	-	-5.5	-4.7	-	-6.3	-9.8	-9.7	-9.4	-	-	-	
	FS	-	-4.8	-3.6	-	-4.5	-5.0	-5.5	-5.2	-	-	-	
Max. Peak Gain (dBi)	MP	-	1.1	-0.9	-	-2.4	-3.6	-3.0	-2.3	-	-	-	
	FS	-	1.4	1.1	-	0.7	-0.9	-0.7	-0.8	-	-	-	
VSWR	MP							≤ 3.6					
	FS							≤ 3.0					
Return Loss	MP							≤ -4.9 dB					
	FS							≤ -6.0 dB					
Peak Gain	MP							≤ 1.1 dBi					
	FS							≤ 1.4 dBi					


1.1.2. 4G DIV

Electrical - Detail													
SPEC	Band	Band	B71	B12 /B13 /B28	B5 /B8 /B26	N74 /N75 /N76	B1 /B2 /B3	B40	Wi-Fi 2G	B38 /B41	B42 /B48 /N77	N79	Wi-Fi 5G
	Freq. (MHz)	600– 700	700– 810	820– 960	1420– 1520	1700– 2170	2300– 2400	2400– 2500	2500– 2690	3300– 4200	4400– 5000	5150– 5850	
Max. VSWR	MP	-	2.8	3.4	-	2.9	2.5	2.4	2.5	-	-	-	
	FS	-	2.8	3.0	-	1.8	1.9	1.9	1.9	-	-	-	
Max. Return Loss (dB)	MP	-	-6.4	-5.3	-	-6.3	-7.3	-7.6	-7.4	-	-	-	
	FS	-	-6.4	-6.1	-	-11.1	-10.1	-10.1	-10.0	-	-	-	
AVG Eff. (%)	MP	-	28.8	26.5	-	7.3	5.4	8.0	11.4	-	-	-	
	FS	-	28.2	30.3	-	30.9	24.3	25.6	25.7	-	-	-	
AVG Gain (dB)	MP	-	-5.4	-6.2	-	-11.4	-12.7	-11.0	-9.5	-	-	-	
	FS	-	-5.5	-5.6	-	-5.1	-6.1	-5.9	-5.9	-	-	-	
Max. Peak Gain (dBi)	MP	-	-0.3	0.3	-	-3.5	-5.6	-2.6	-0.8	-	-	-	
	FS	-	-0.4	0.6	-	0.4	-0.5	-0.6	-1.3	-	-	-	
VSWR	MP											≤ 3.4	
	FS											≤ 3.0	
Return Loss	MP											≤ -5.3 dB	
	FS											≤ -6.1 dB	
Peak Gain	MP											≤ 0.3 dBi	
	FS											≤ 0.6 dBi	

1.2. Mechanical & Environmental

Mechanical	
Antenna Dimensions	Φ 81 × 14.5 mm
Antenna Material & Color	ABS + PC & Black
Cable Type & Color & Length	RG174 & Black & 1500 mm
Connector Type	SMA Male
Weight	Typ. 82 g
Mounting Type	Screw
Environmental	
Operation Temperature	-40 °C to +85 °C
Storage Temperature	-40 °C to +85 °C
Ingress Protection (IP) Rating	IP66
RoHS Compliant	Yes


2 Drawing

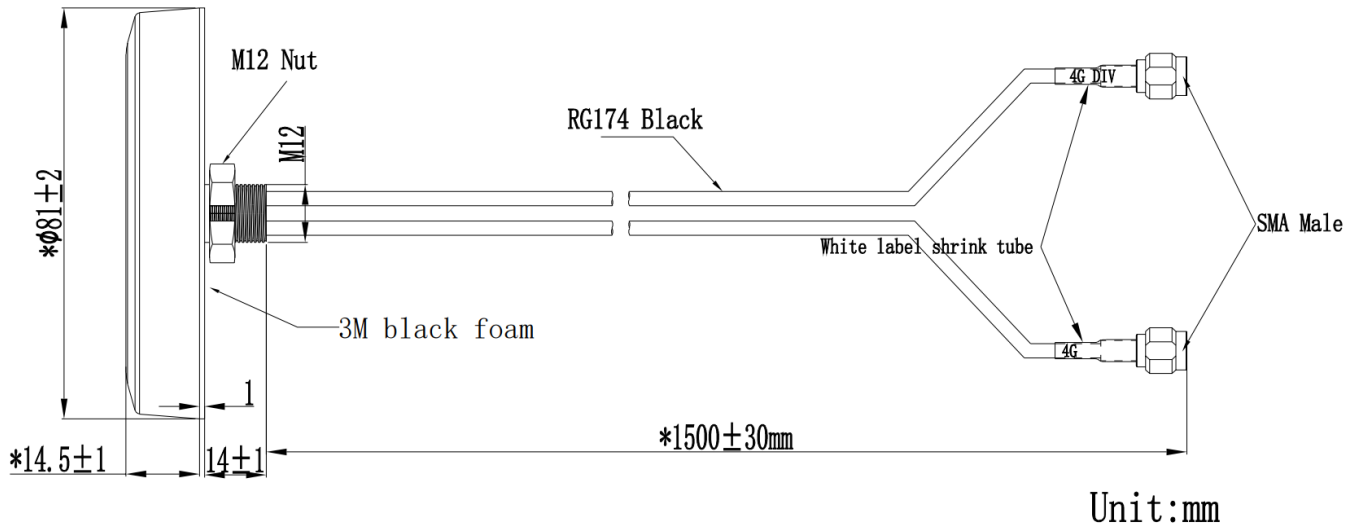

3 Detailed Performance


3.1. S-Parameter Test

3.1.1. VSWR

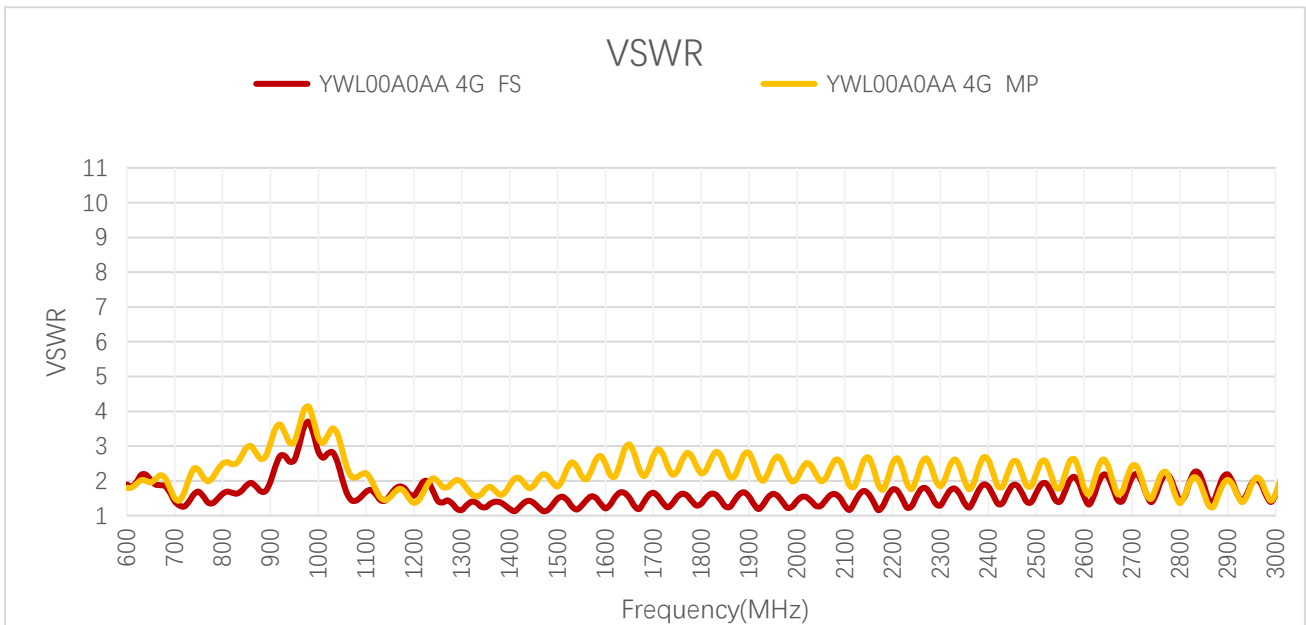

VSWR - 4G


Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
VSWR	MP	-	-	1.4	2.5	3.1	3.5	-	2.9	2.2	2.5
	FS	-	-	1.3	1.6	2.0	3.0	-	1.6	1.3	1.6
Frequency (MHz)		1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
VSWR	MP	2.6	2.6	2.0	2.5	1.8	2.1	-	-	-	-
	FS	1.6	1.7	1.4	1.9	1.5	1.8	-	-	-	-

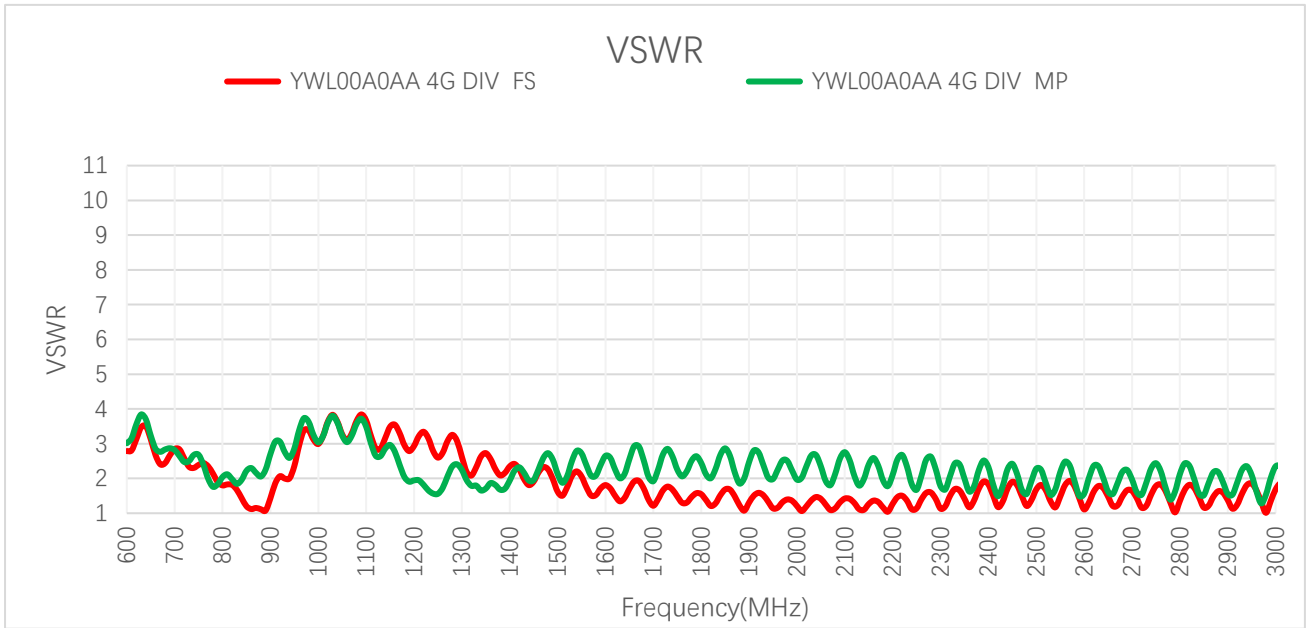

VSWR - 4G DIV


Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
VSWR	MP	-	-	2.6	1.8	2.7	3.4	-	2.3	2.6	1.9
	FS	-	-	2.8	1.7	1.4	3.0	-	1.4	1.7	1.2
Frequency (MHz)		1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
VSWR	MP	2.0	2.0	2.0	2.4	1.6	2.2	-	-	-	-
	FS	1.1	1.1	1.4	1.9	1.1	1.7	-	-	-	-

3.1.2. Return Loss

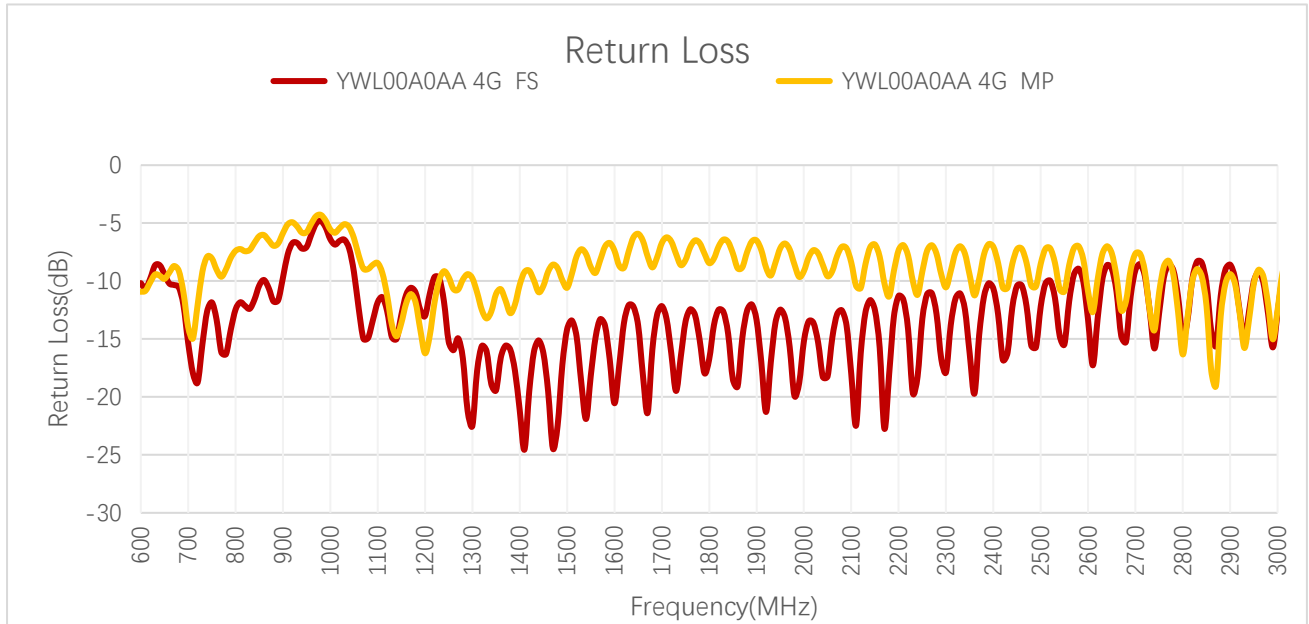

Return Loss (dB) - 4G


Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
Return Loss (dB)	MP	-	-	-14.9	-7.3	-5.9	-5.0	-	-6.2	-8.6	-7.5
	FS	-	-	-17.9	-12.4	-9.7	-6.0	-	-13.3	-16.5	-12.6
Frequency (MHz)		1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
Return Loss (dB)	MP	-7.2	-7.1	-9.5	-7.2	-10.9	-9.0	-	-	-	-
	FS	-12.5	-11.6	-16.3	-10.4	-13.4	-11.3	-	-	-	-

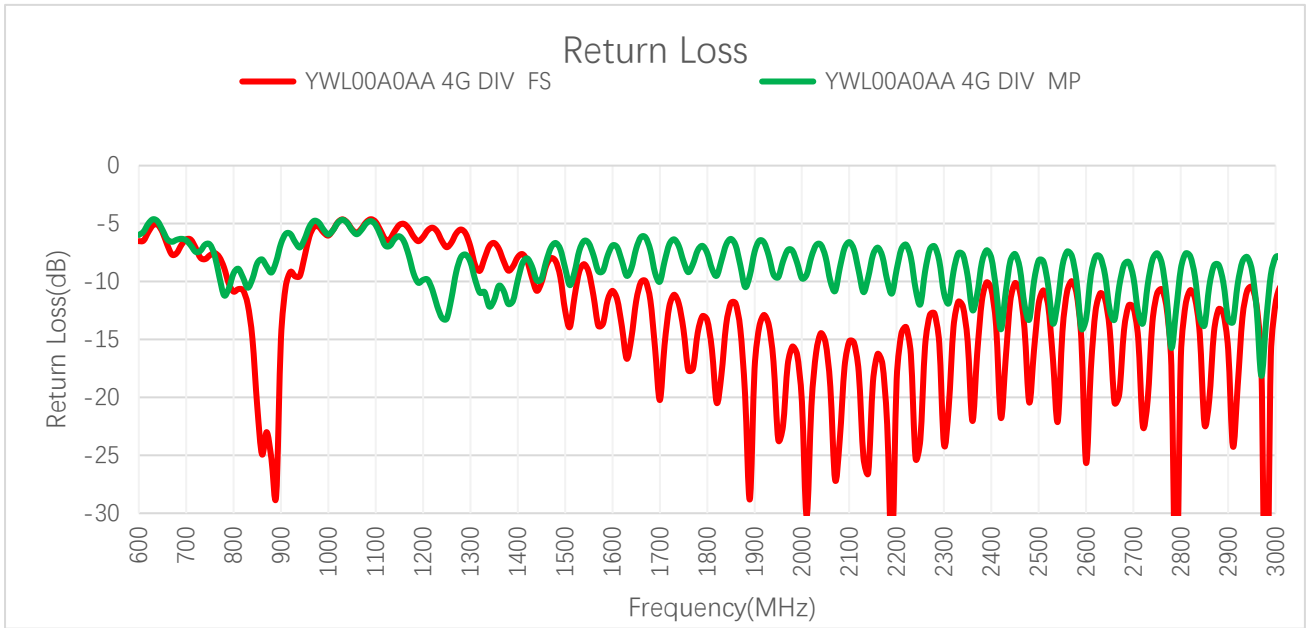

Return Loss (dB) - 4G DIV

Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880	
Return Loss (dB)	MP	-	-	-6.9	-10.5	-6.7	-5.3	-	-8.3	-6.9	-10.5
	FS	-	-	-6.4	-12.0	-15.0	-6.1	-	-15.5	-11.9	-19.8
Frequency (MHz)	1950	2140	2350	2450	2600	2690	4700	5000	5500	6000	
Return Loss (dB)	MP	-9.6	-9.6	-9.5	-7.6	-13.2	-8.3	-	-	-	-
	FS	-23.7	-26.5	-15.2	-10.1	-25.7	-12.1	-	-	-	-

3.1.3. Isolation

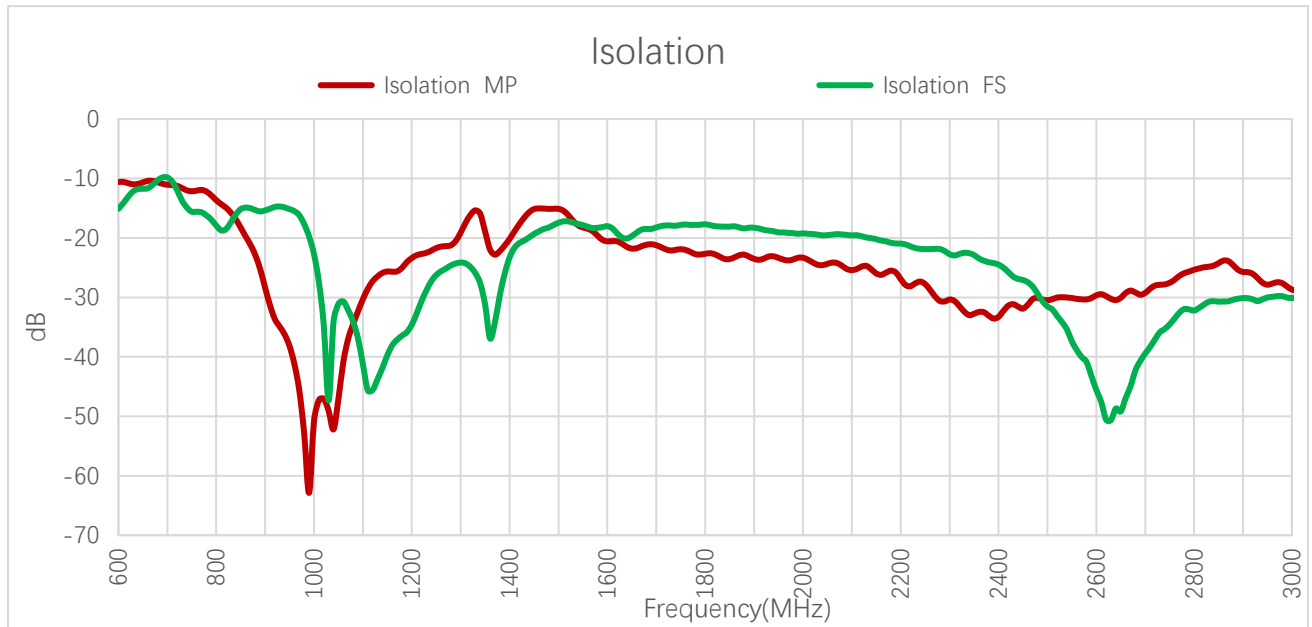


Max Isolation (dB)

Band	B71	B12/ B13/ B28	B5/ B8/ B26	N74/ N75/ N76	B1/ B2/ B3	B40	Wi-Fi 2G	B38/ B41	B42/ B48/ N77	N79	Wi-Fi 5G	
Freq. (MHz)	600– 700	700– 810	820– 960	1420– 1520	1700– 2170	2300– 2400	2400– 2500	2500– 2690	3300– 4200	4400– 5000	5150– 5850	
Isolation (dB)	MP	-	-12.2	-26.6	-	-23.6	-32.3	-31.3	-29.9	-	-	-
	FS	-	-14.8	-15.6	-	-18.8	-23.3	-27.5	-41.7	-	-	-


3.2. Radiation Performance Test

3.2.1. Efficiency

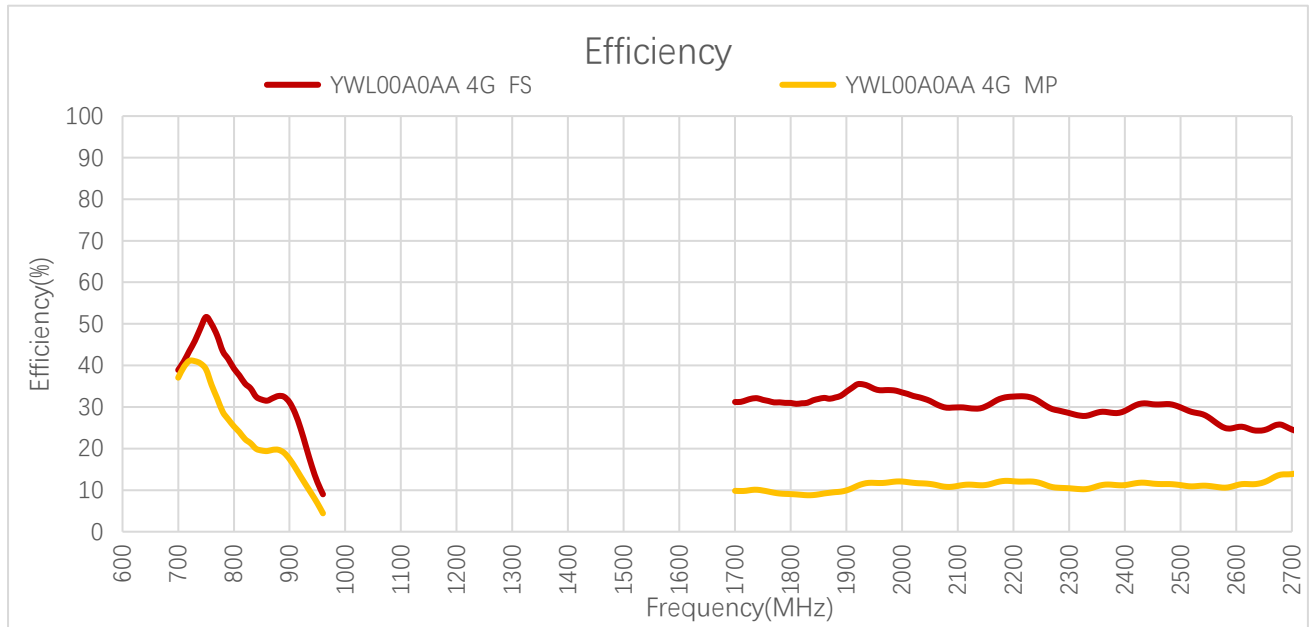

Efficiency (%) - 4G


Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
Efficiency (%)	MP	-	-	39.6	21.3	17.5	4.4	-	9.8	10.1	9.5
	FS	-	-	40.9	34.5	31.1	9.0	-	31.2	32.1	32.3
Frequency (MHz)		1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
Efficiency (%)	MP	11.8	11.2	10.9	11.6	11.2	13.8	-	-	-	-
	FS	34.4	29.7	28.6	30.7	25.1	25.2	-	-	-	-

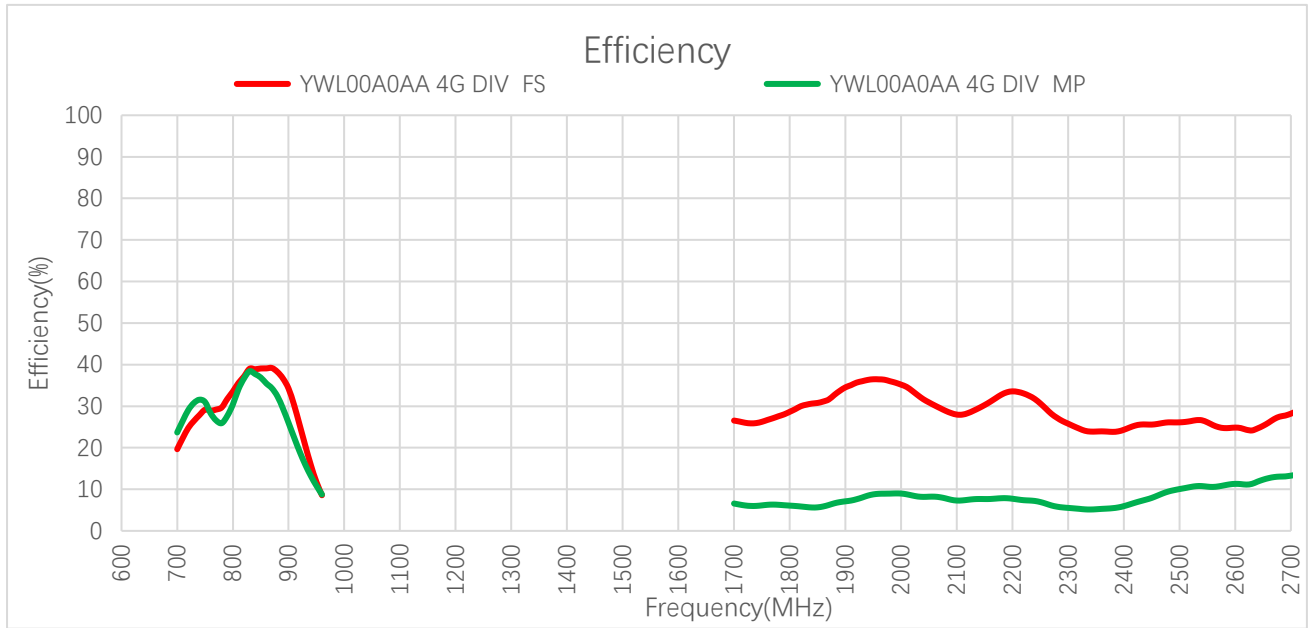

Efficiency (%) - 4G DIV


Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
Efficiency (%)	MP	-	-	26.5	38.4	26.0	8.8	-	6.3	6.0	6.6
	FS	-	-	22.3	39.0	34.2	8.6	-	26.3	25.9	32.7
Frequency (MHz)		1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
Efficiency (%)	MP	8.8	7.7	5.2	7.9	11.3	13.1	-	-	-	-
	FS	36.5	29.6	23.9	25.6	24.9	27.8	-	-	-	-

3.2.2. Average Gain

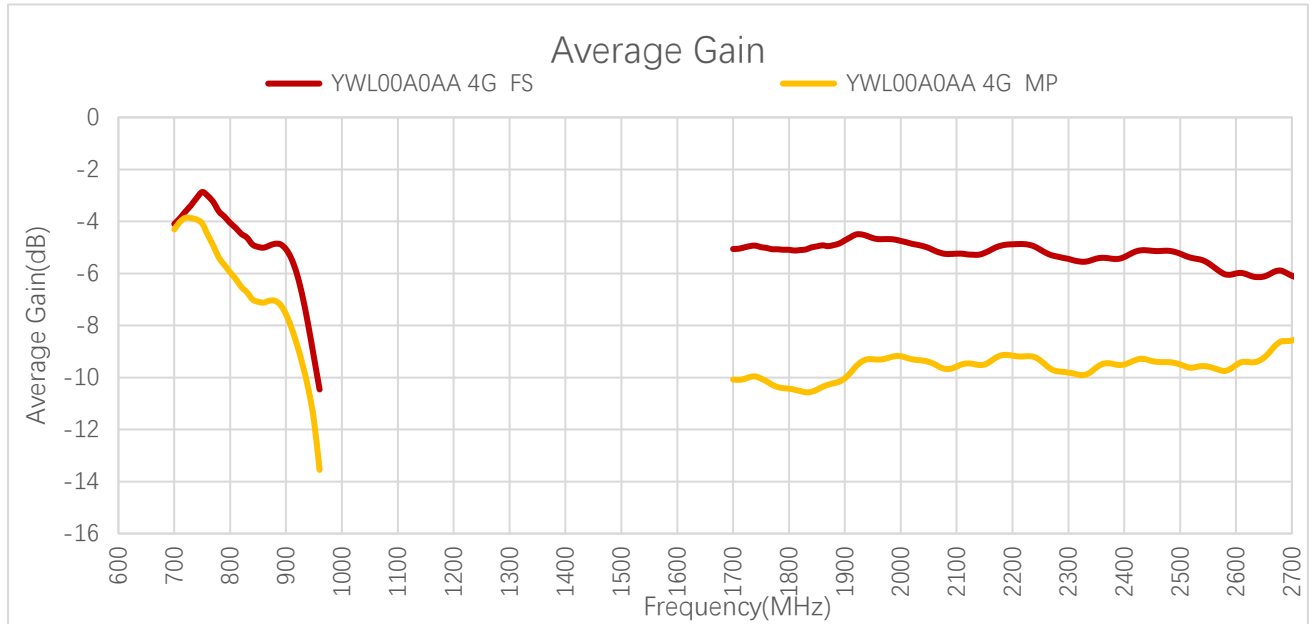

Average Gain (dB) - 4G


Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
Average Gain (dB)	MP	-	-	-4.0	-6.7	-7.6	-13.6	-	-10.1	-10.0	-10.2
	FS	-	-	-3.9	-4.6	-5.1	-10.5	-	-5.1	-4.9	-4.9
Frequency (MHz)		1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
Average Gain (dB)	MP	-9.3	-9.5	-9.6	-9.4	-9.5	-8.6	-	-	-	-
	FS	-4.6	-5.3	-5.4	-5.1	-6.0	-6.0	-	-	-	-

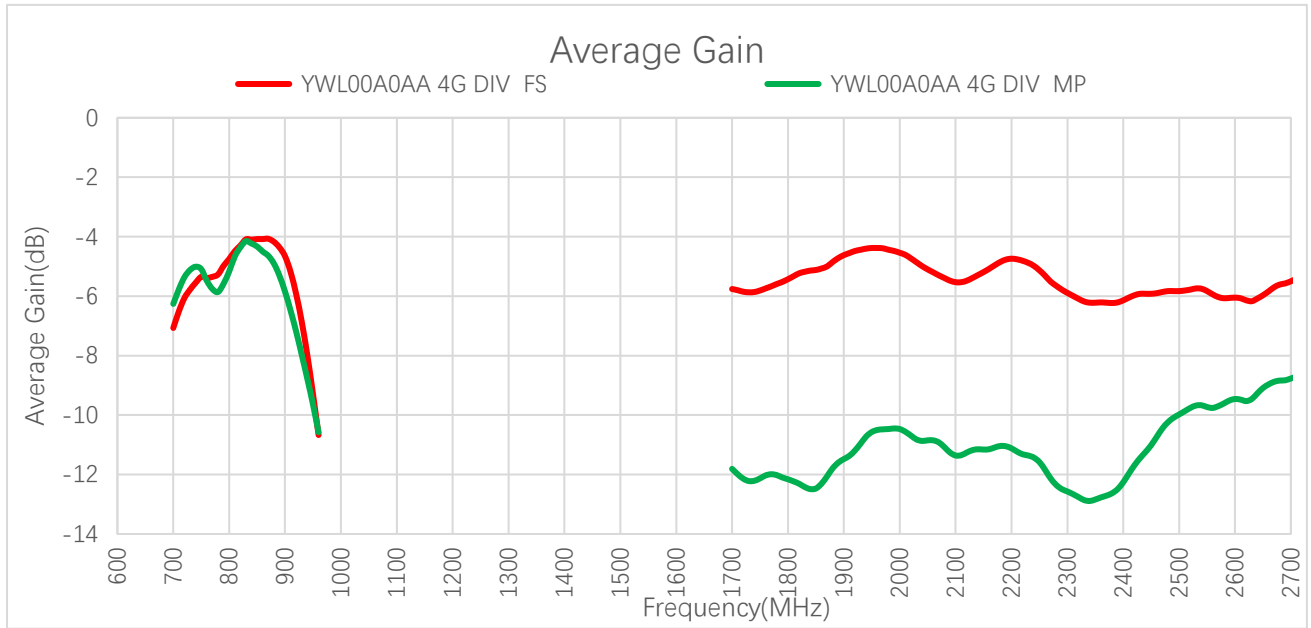

Average Gain (dB) - 4G DIV


Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
Average Gain (dB)	MP	-	-	-5.8	-4.2	-5.9	-10.6	-	-12.0	-12.2	-11.8
	FS	-	-	-6.5	-4.1	-4.7	-10.7	-	-5.8	-5.9	-4.9
Frequency (MHz)		1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
Average Gain (dB)	MP	-10.6	-11.2	-12.8	-11.0	-9.5	-8.8	-	-	-	-
	FS	-4.4	-5.3	-6.2	-5.9	-6.1	-5.6	-	-	-	-

3.2.3. Peak Gain

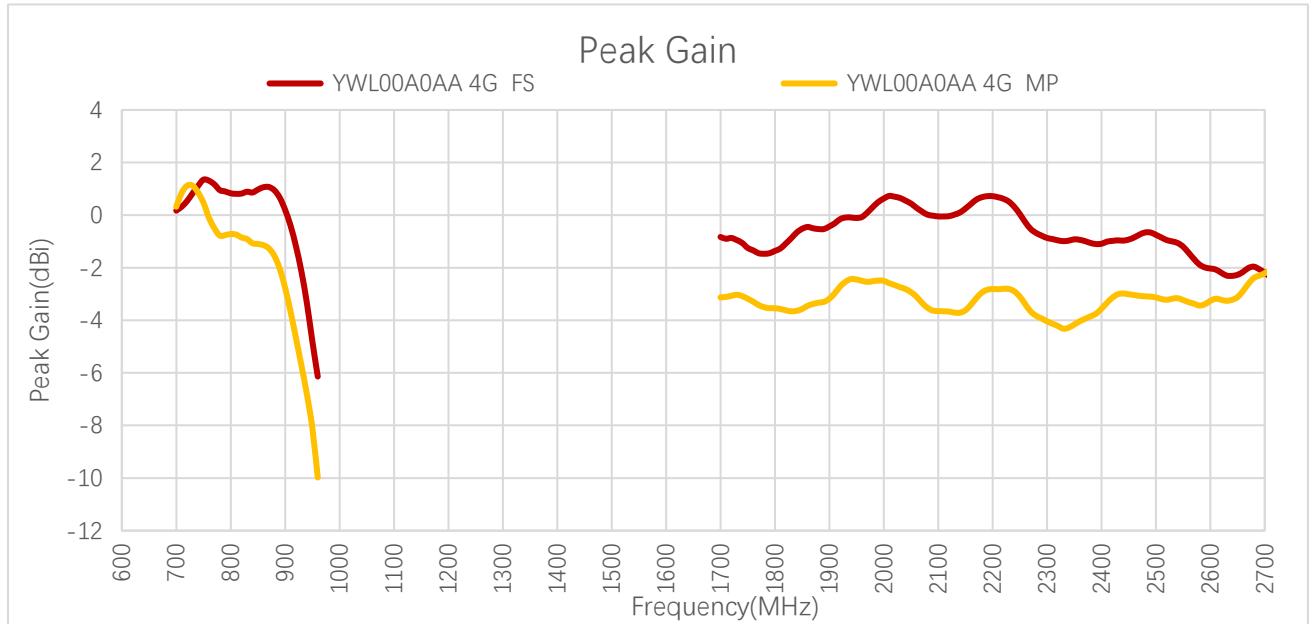

Peak Gain (dBi) - 4G

Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
Peak Gain (dBi)	MP	-	-	0.9	-0.9	-2.8	-10.0	-	-3.1	-3.1	-3.3
	FS	-	-	0.3	0.9	0.2	-6.1	-	-0.9	-1.1	-0.5
Frequency (MHz)		1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
Peak Gain (dBi)	MP	-2.5	-3.7	-4.2	-3.0	-3.3	-2.3	-	-	-	-
	FS	-0.1	0.1	-0.9	-0.9	-2.0	-2.1	-	-	-	-

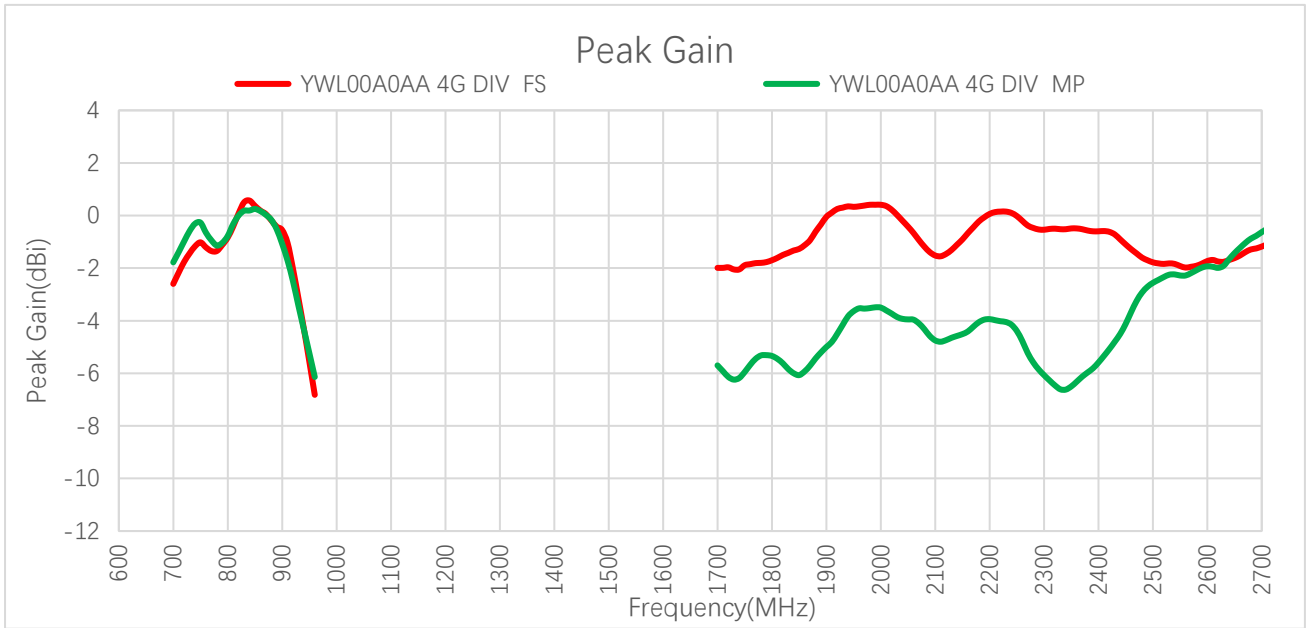


Peak Gain (dBi) - 4G DIV

Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
Peak Gain (dBi)	MP	-	-	-1.4	0.2	-1.1	-6.1	-	-5.9	-6.2	-5.4
	FS	-	-	-2.2	0.5	-0.6	-6.8	-	-2.0	-2.1	-0.6
Frequency (MHz)		1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
Peak Gain (dBi)	MP	-3.6	-4.6	-6.5	-4.1	-1.9	-0.8	-	-	-	-
	FS	0.3	-1.1	-0.5	-1.1	-1.7	-1.3	-	-	-	-


3.2.4. 3D & 2D Radiation Pattern


3.2.4.1. Test Status: Free Space


- Test Chamber: GL-S-1

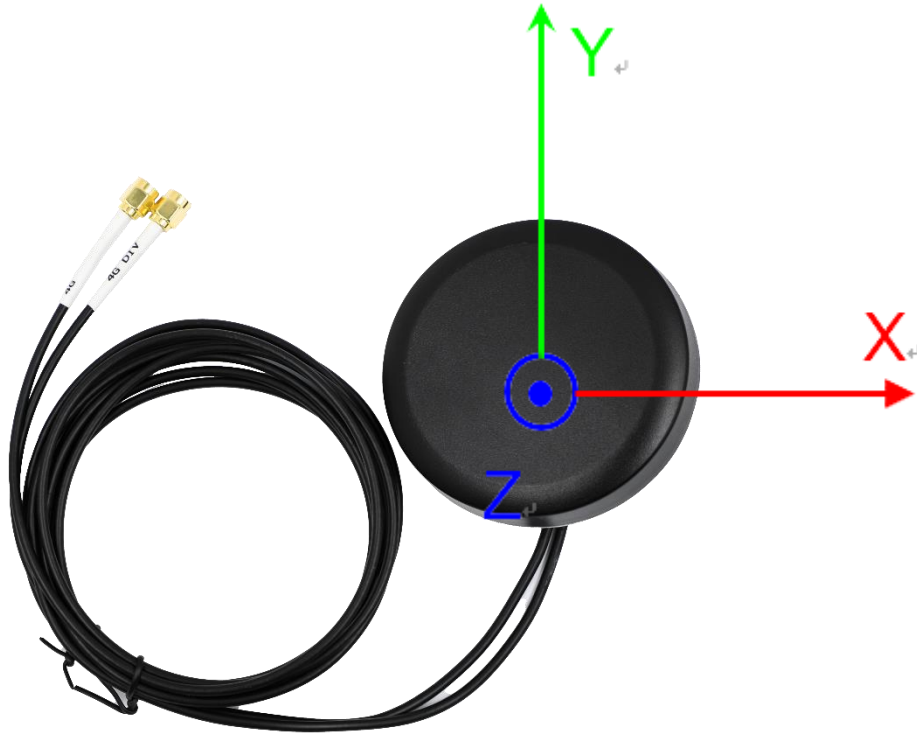


● **4G FS**

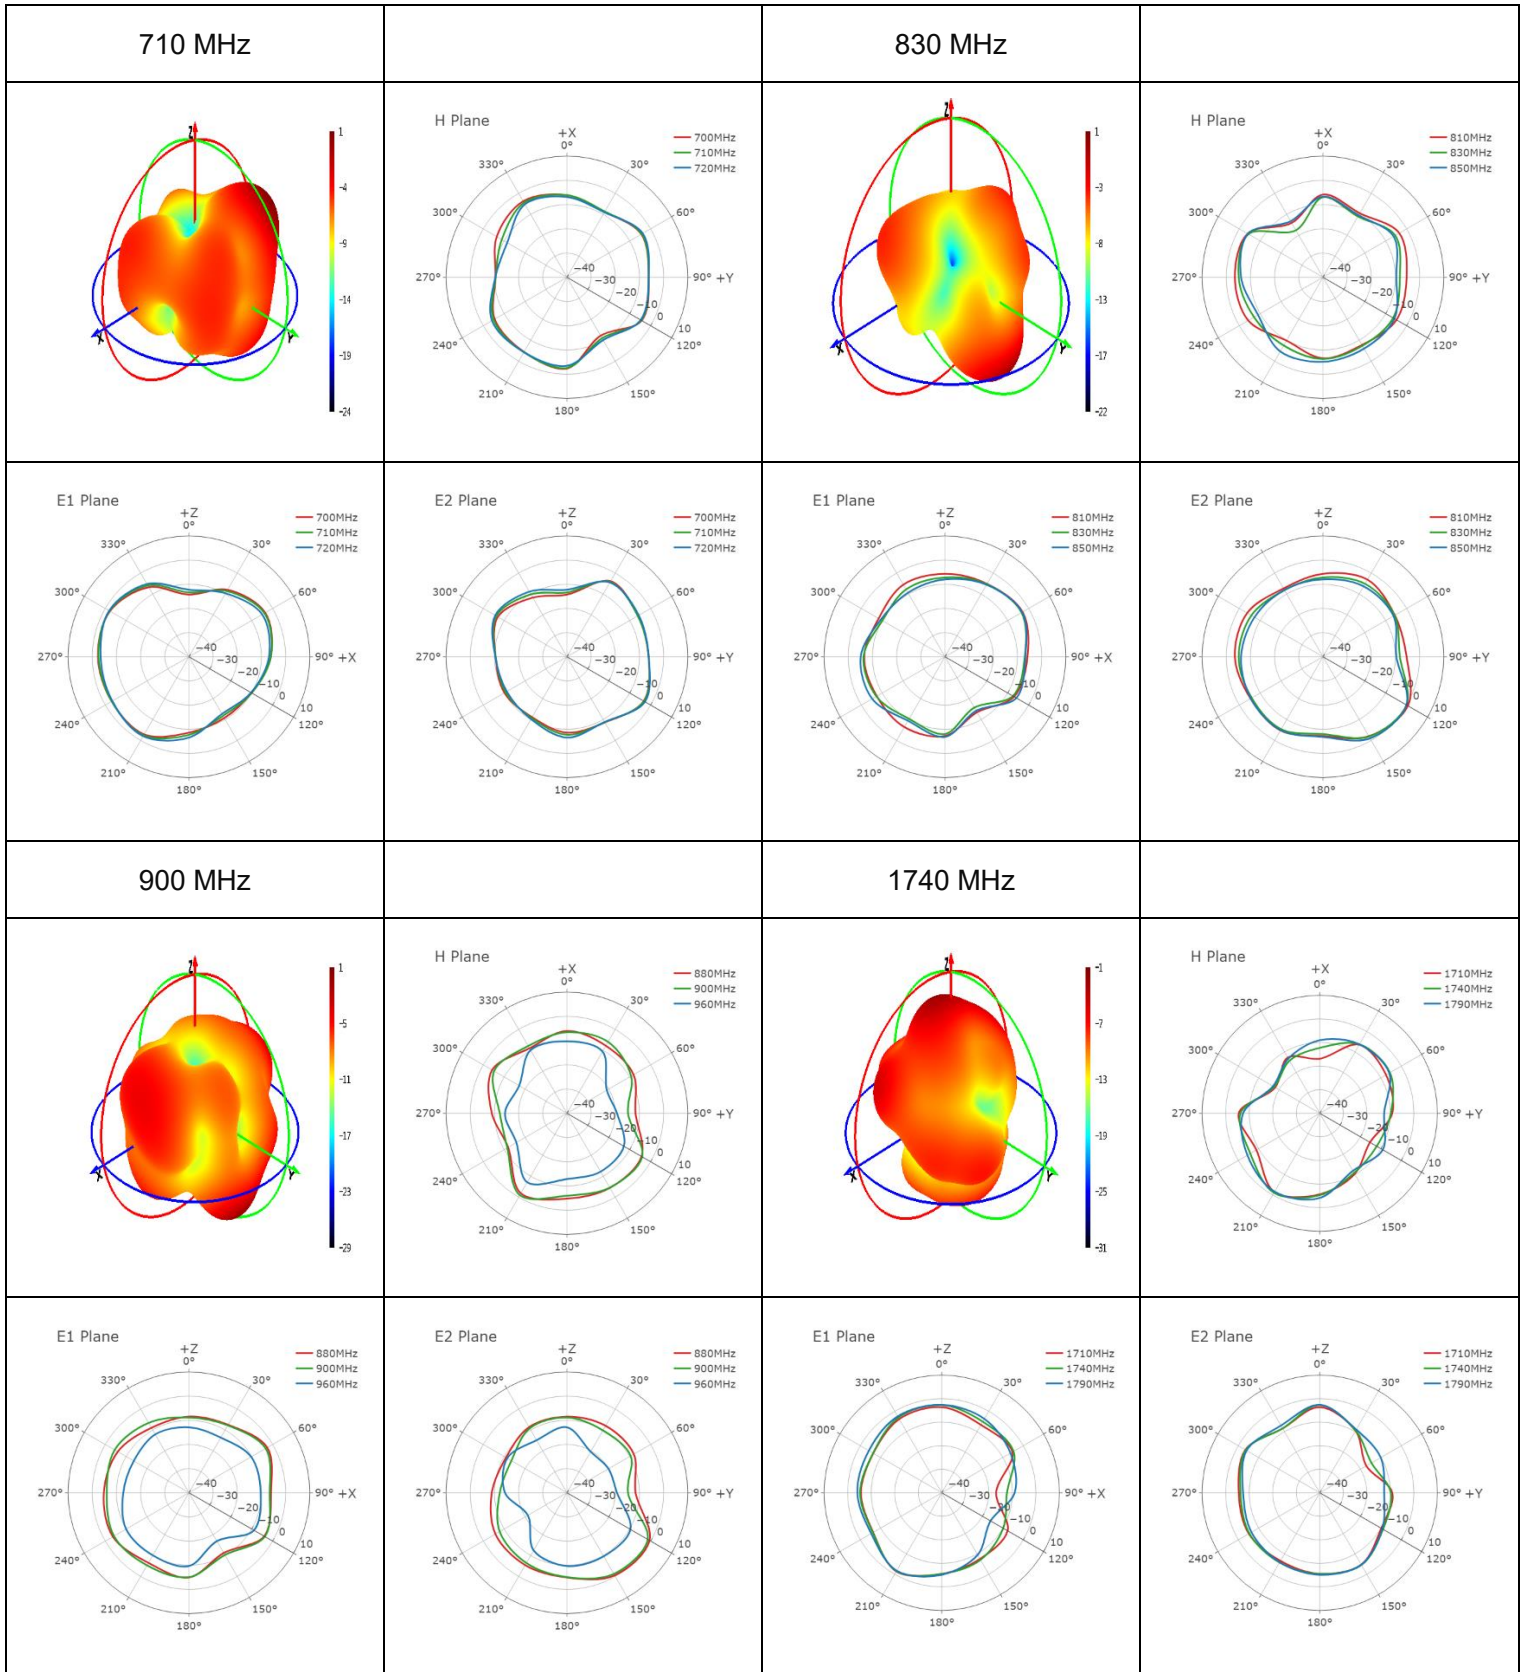


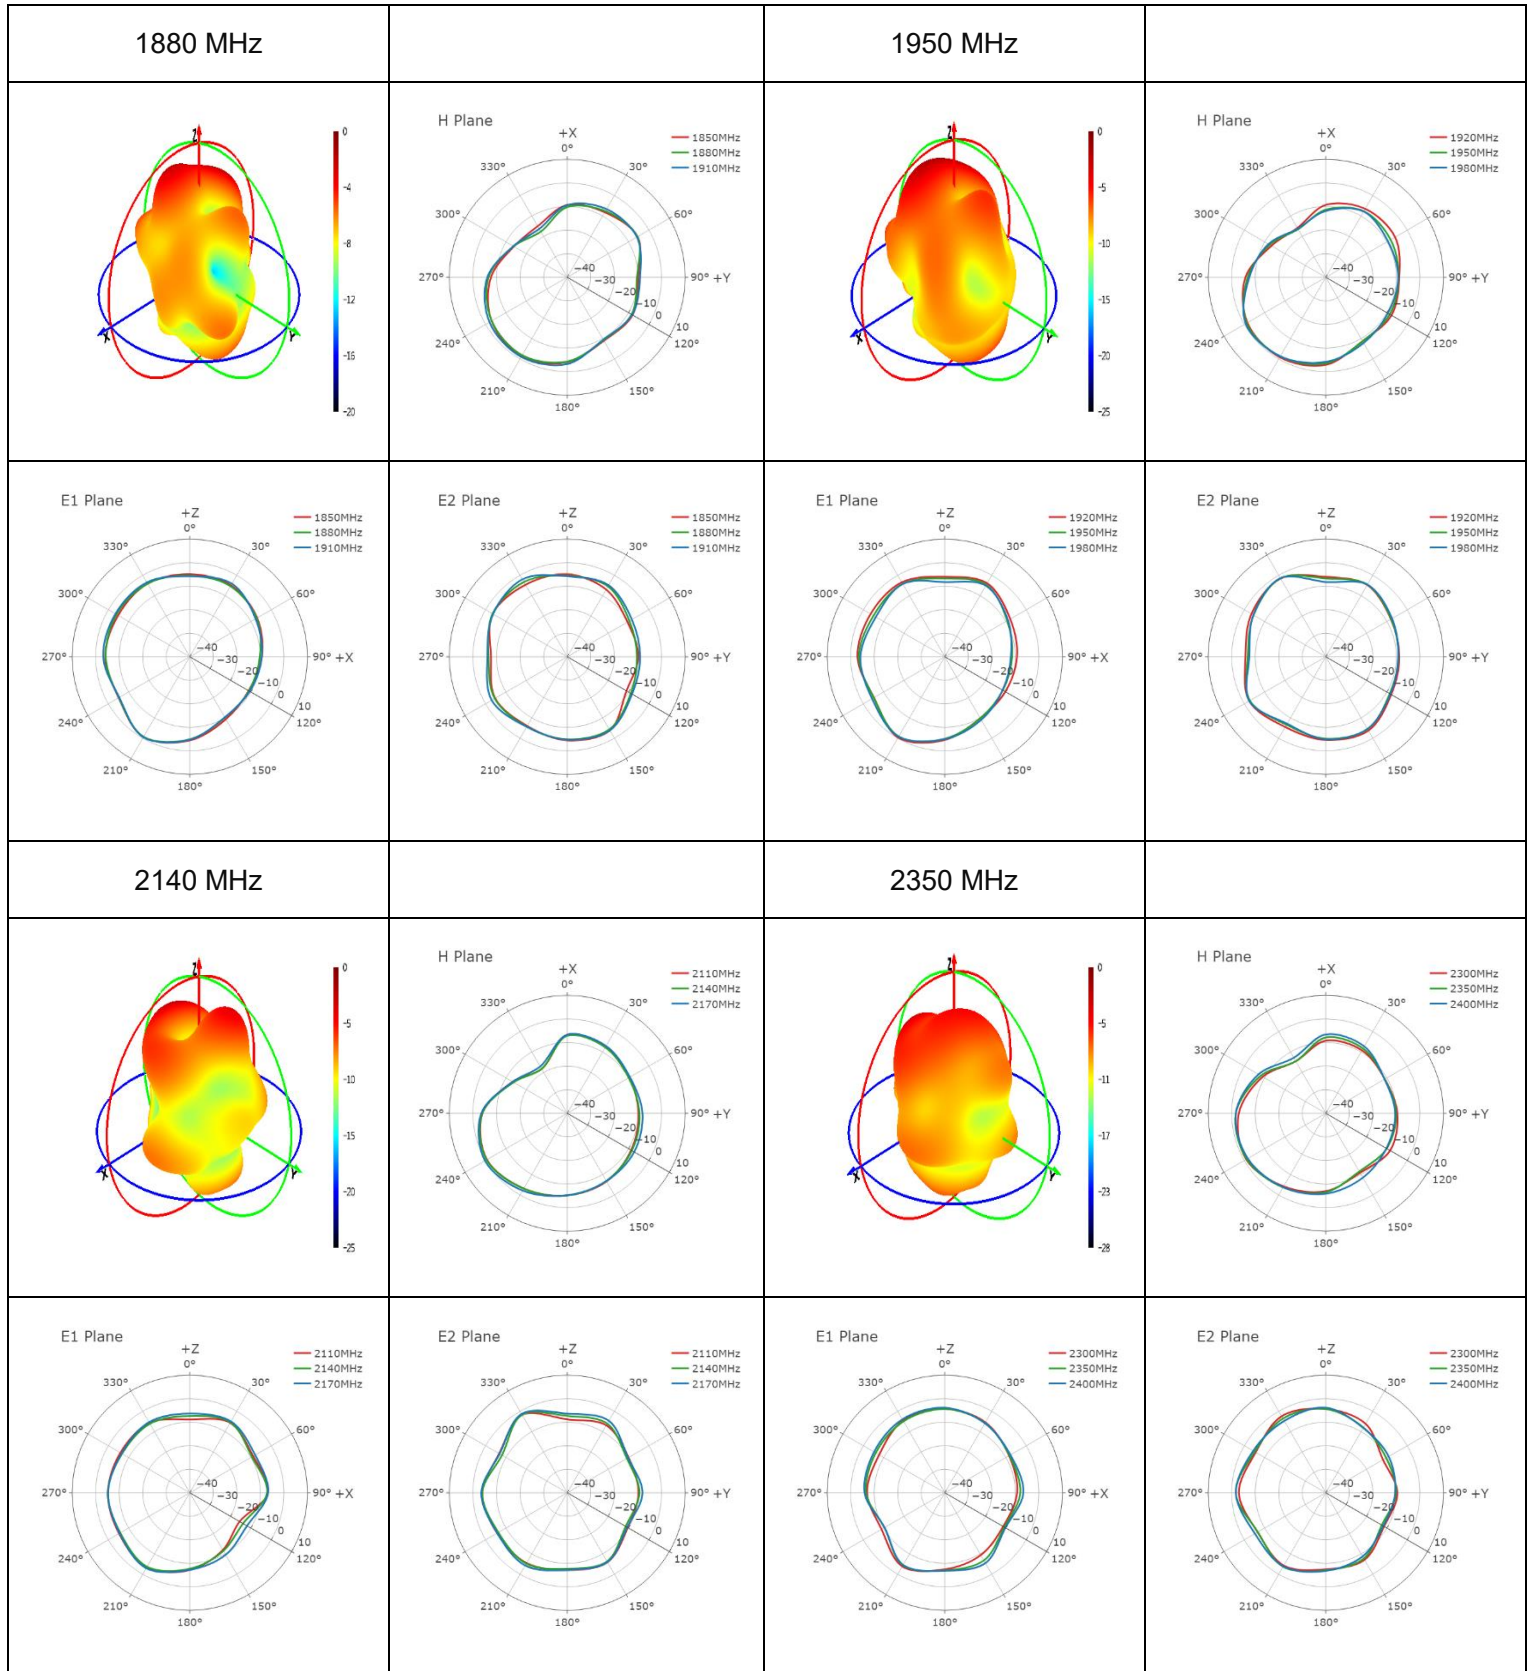


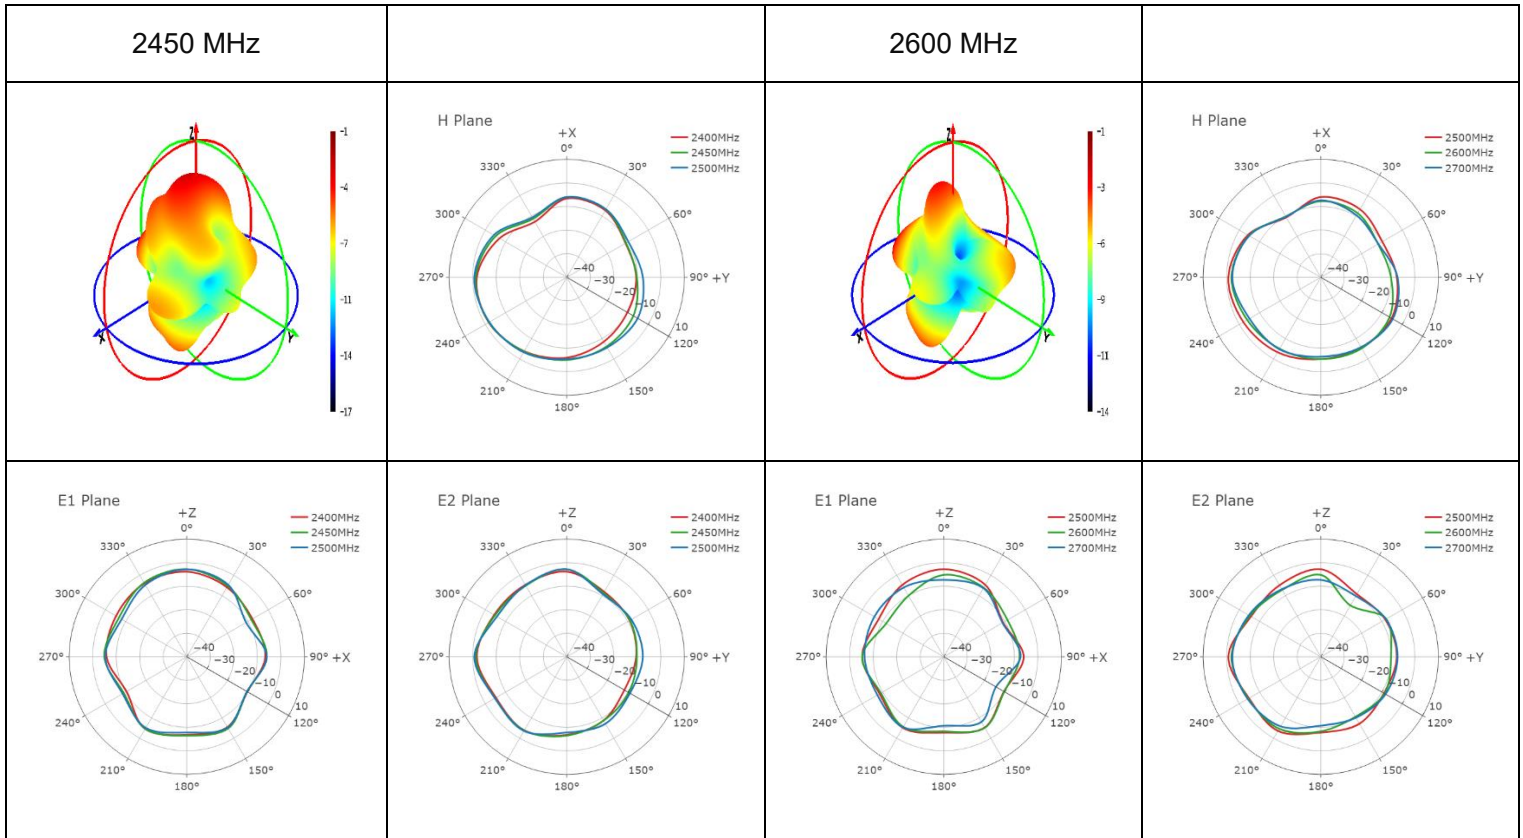

● **4G DIV FS**

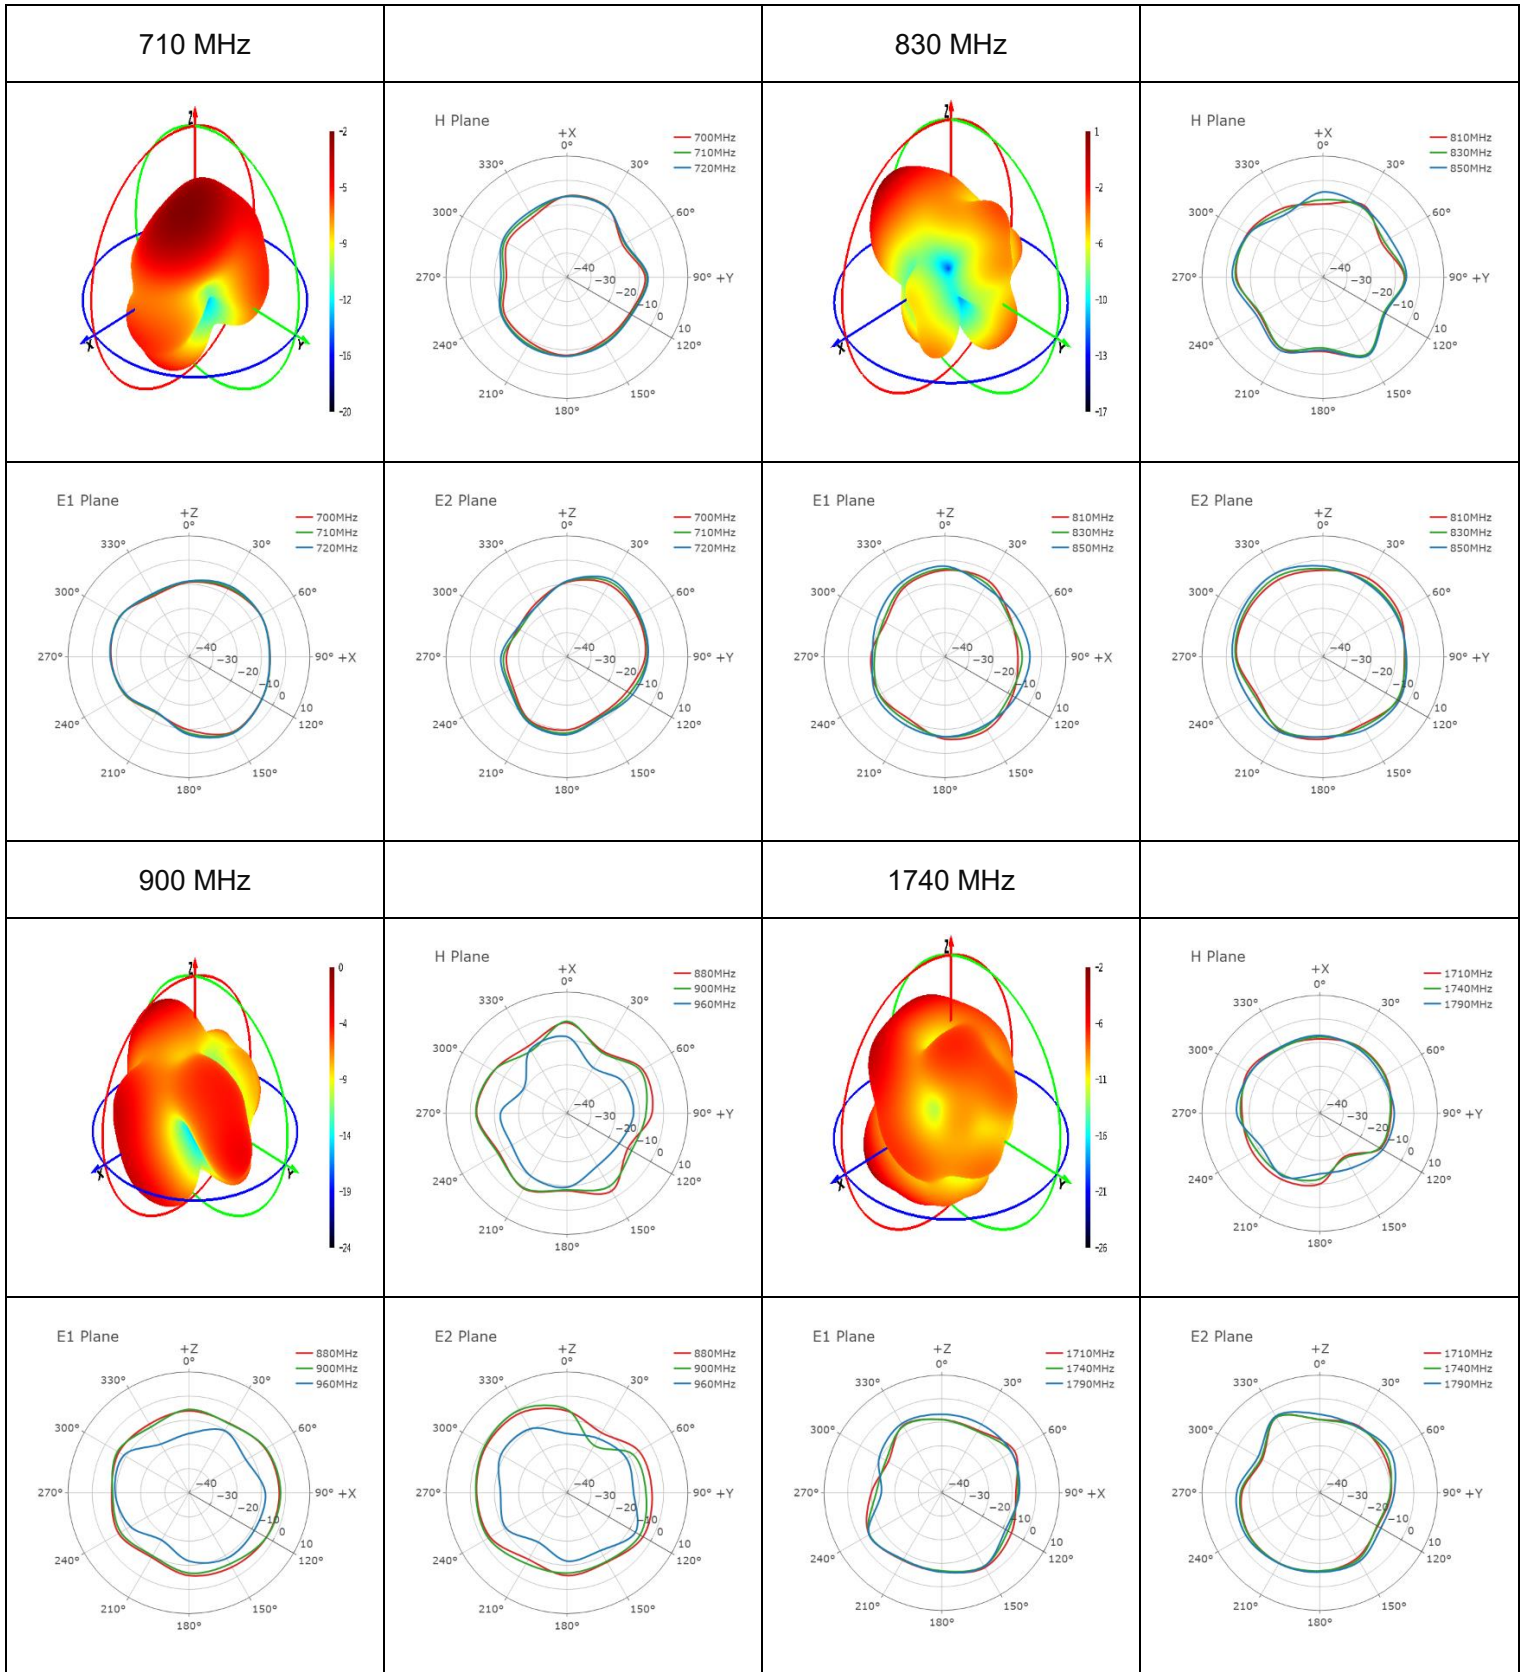


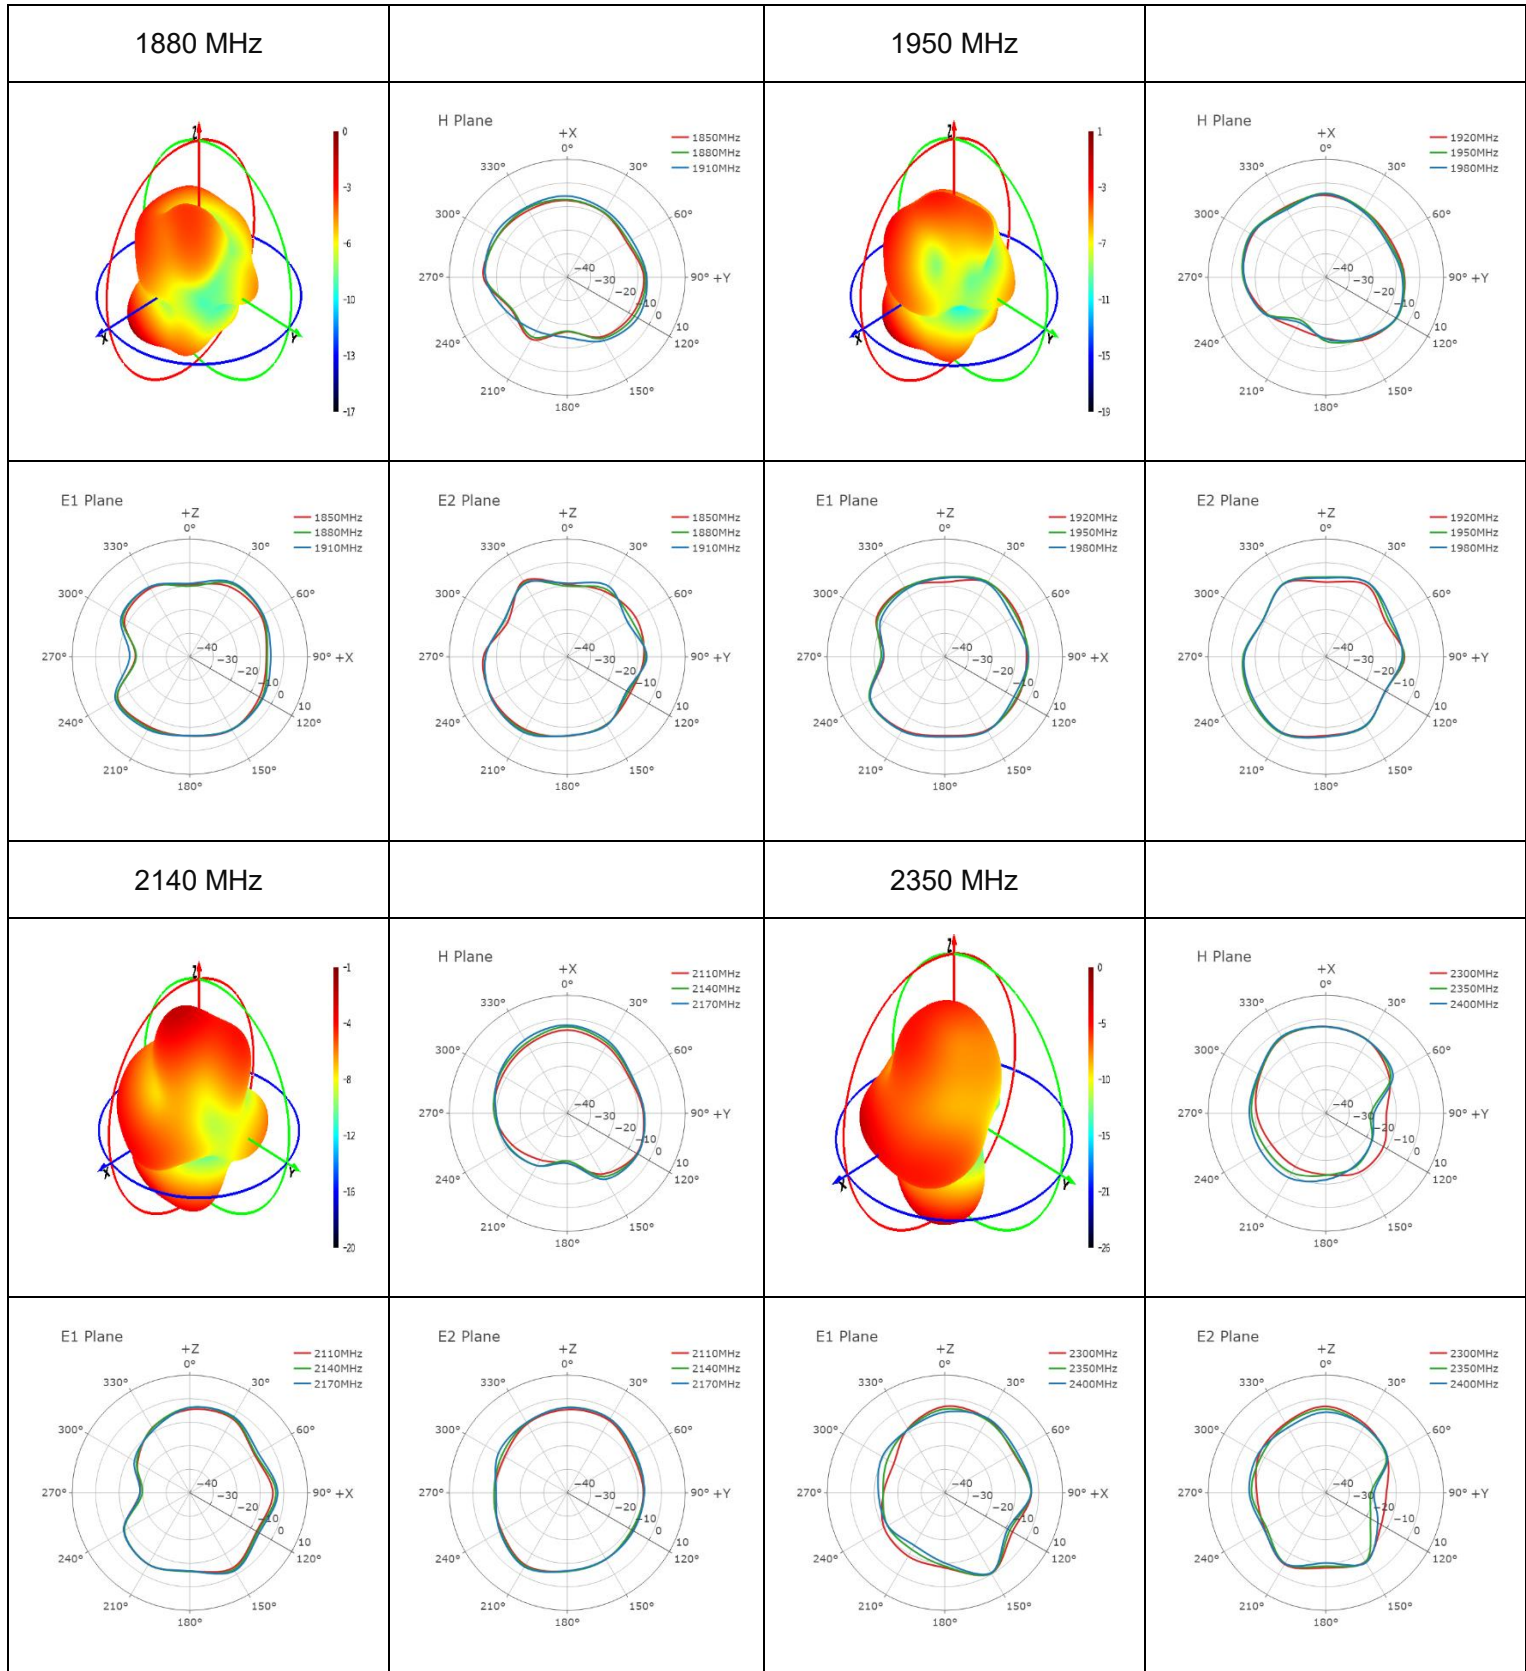

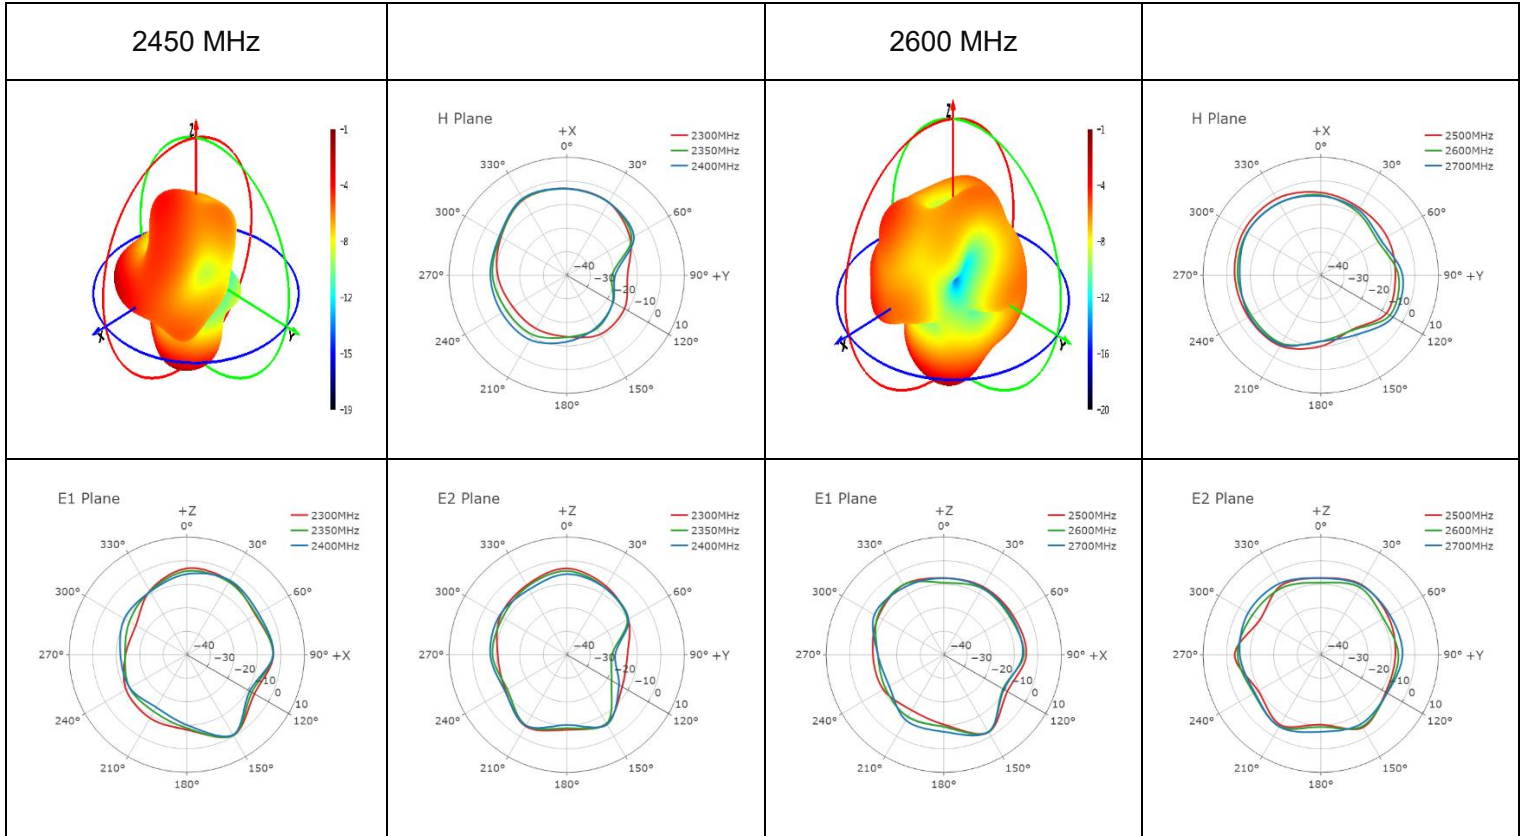



3.2.4.2. Test Status: On 300 × 300 mm Metal Plane


- Test Chamber: GL-S-1

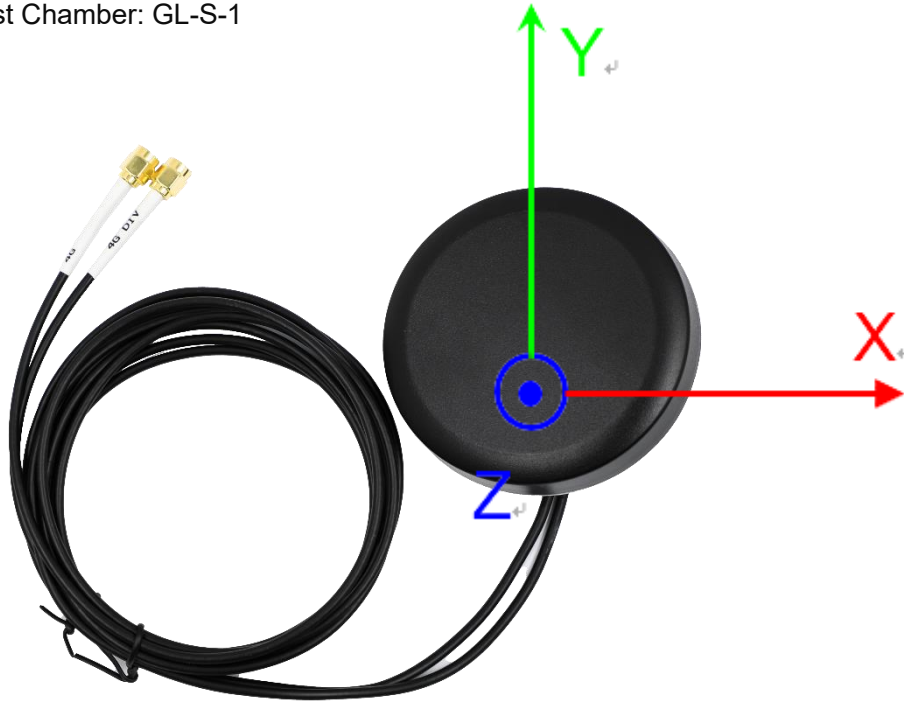


● **4G MP**

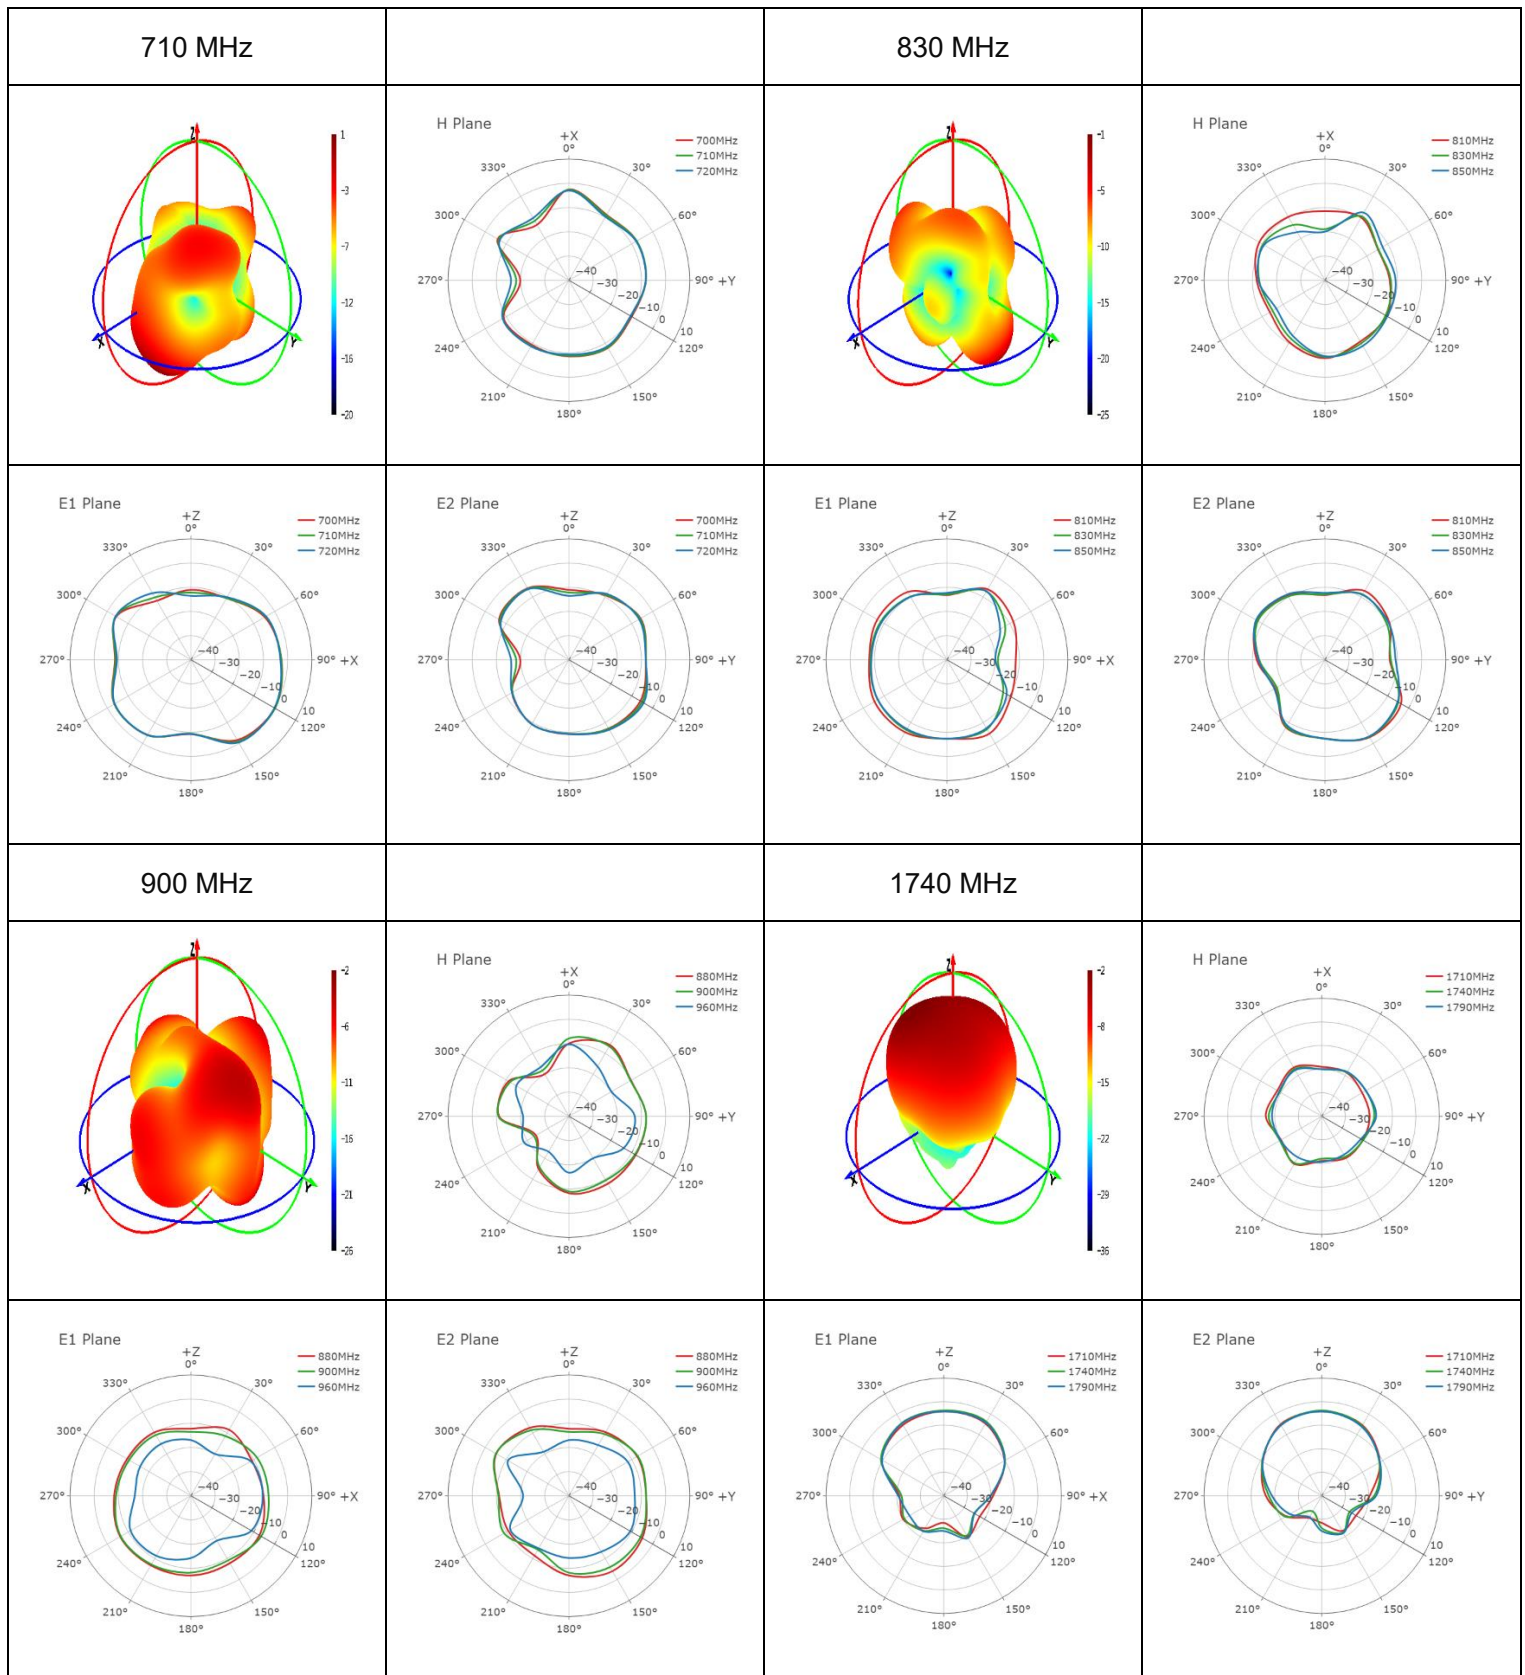


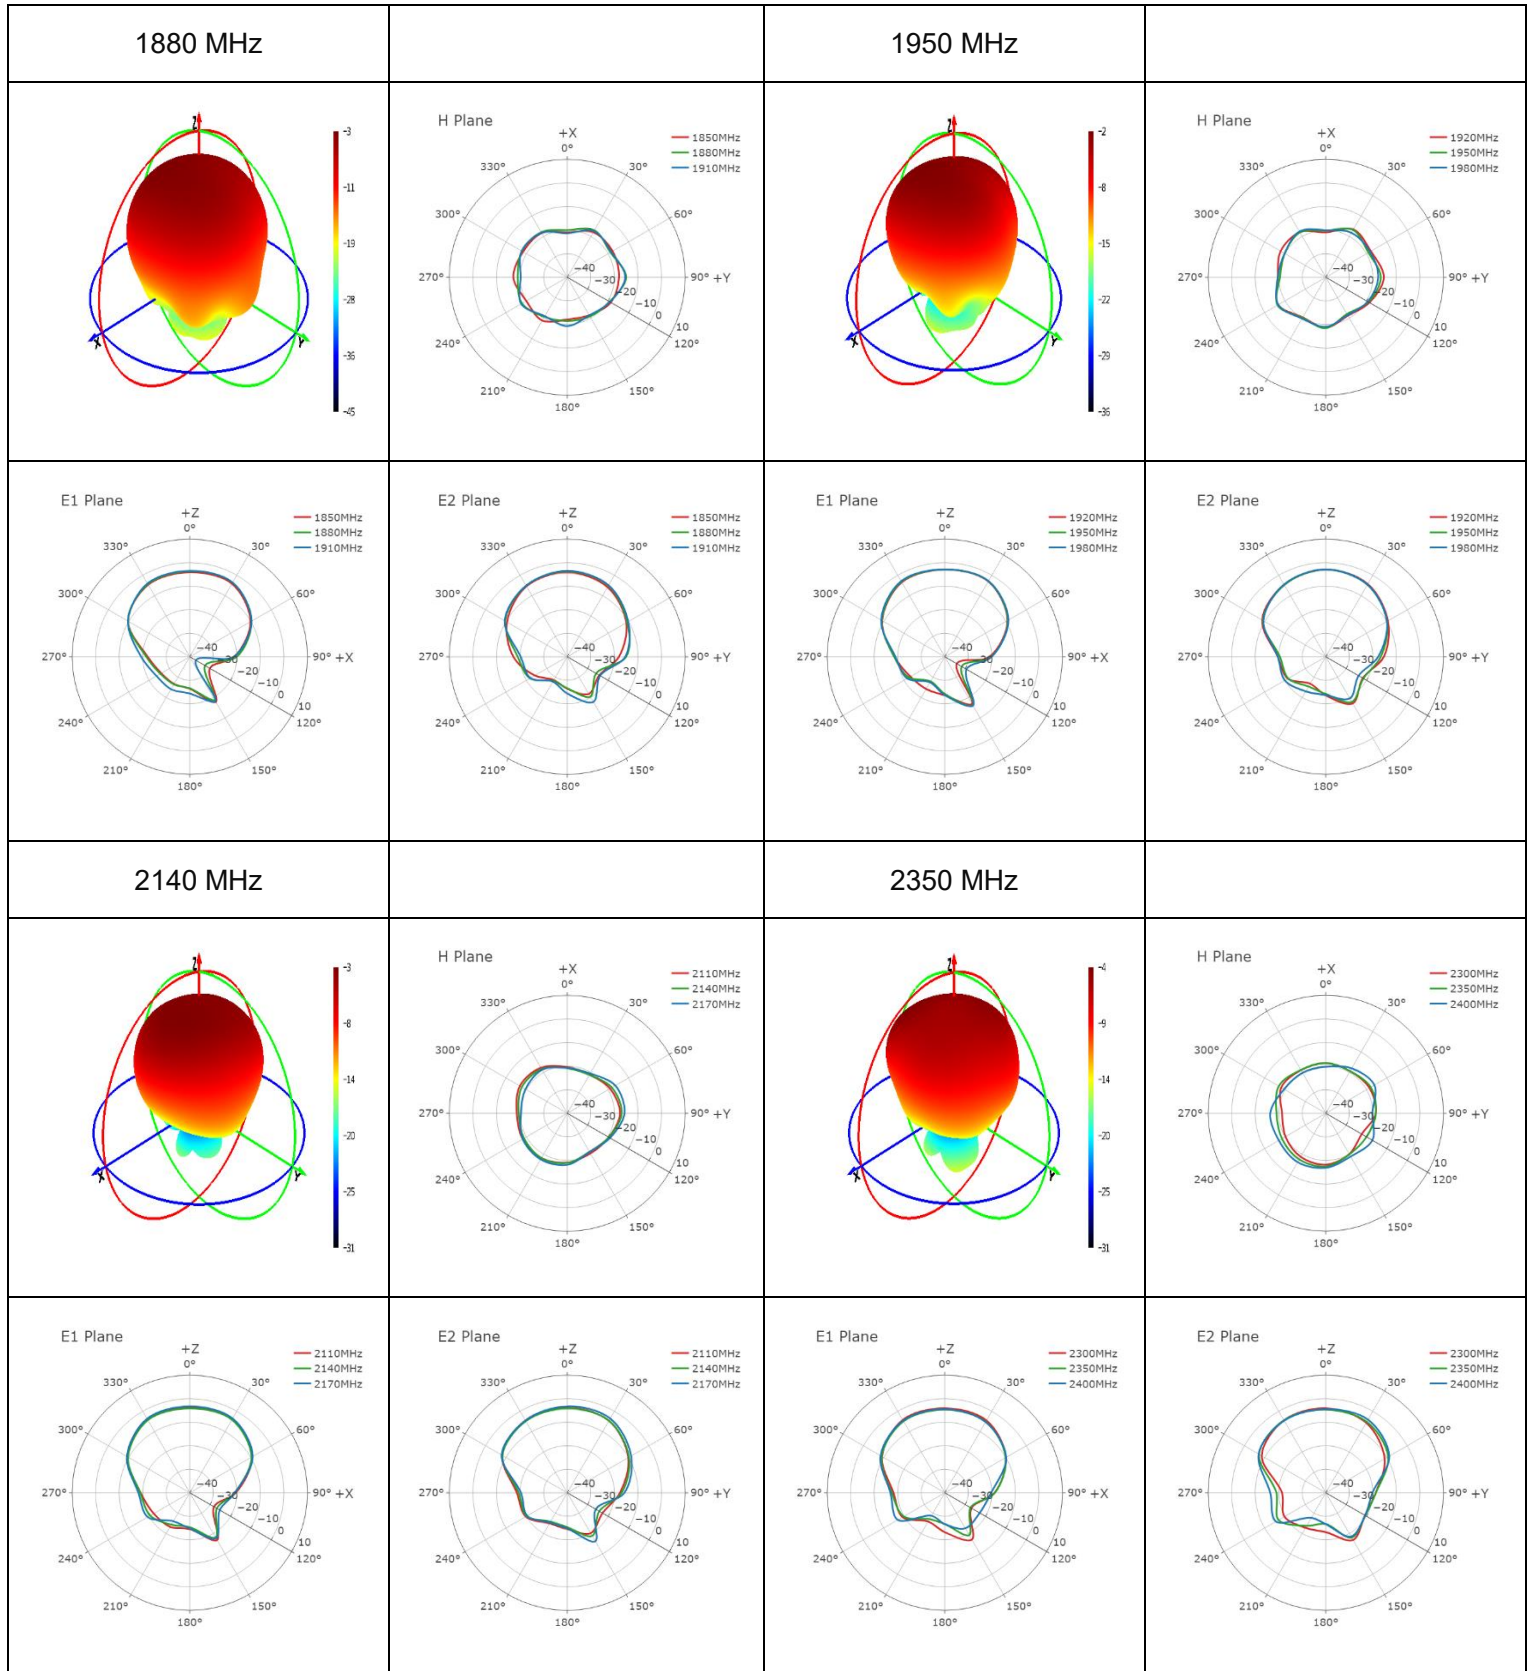


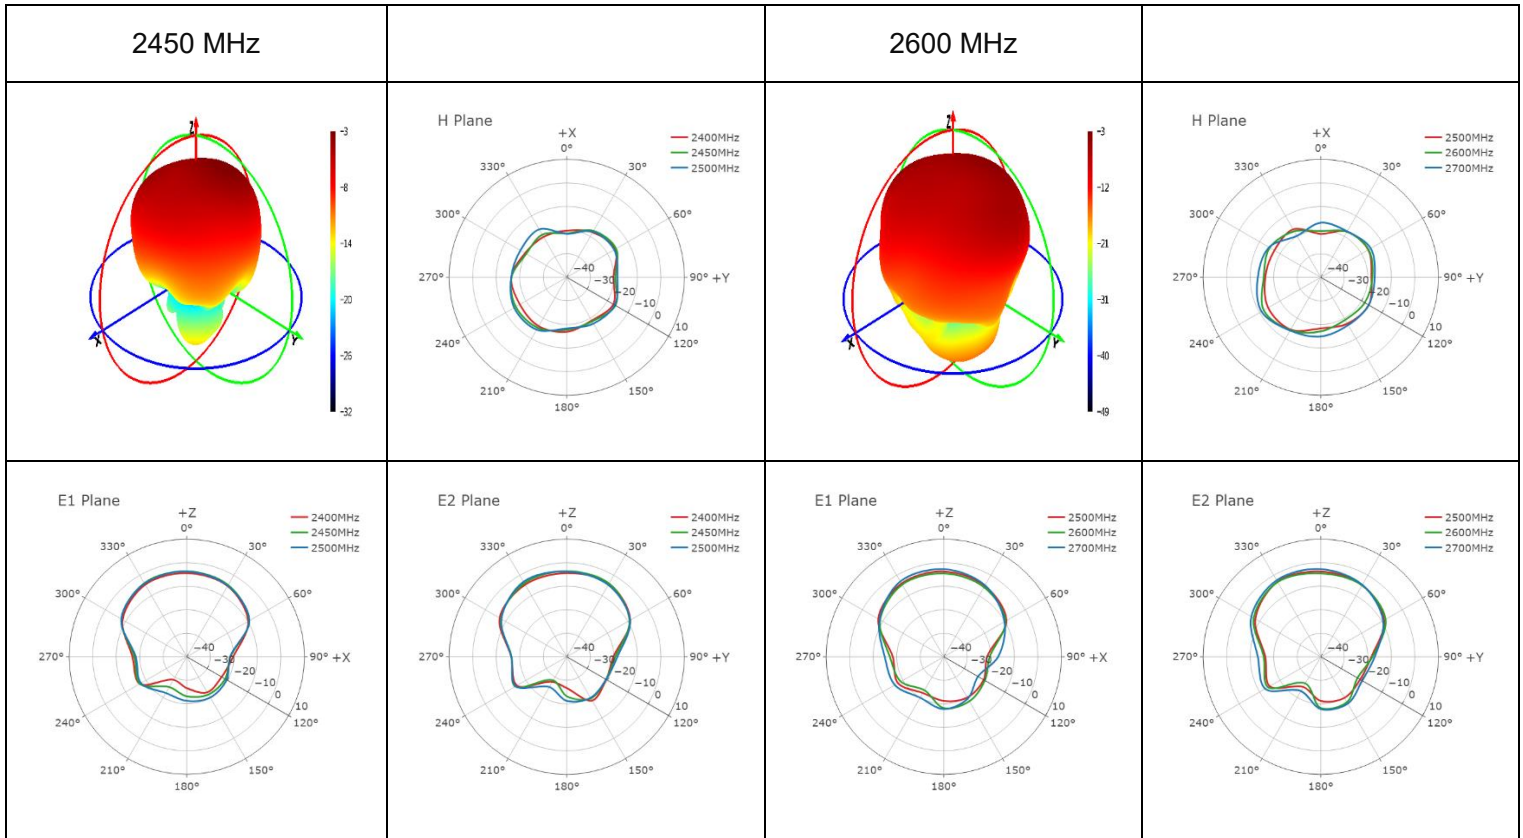

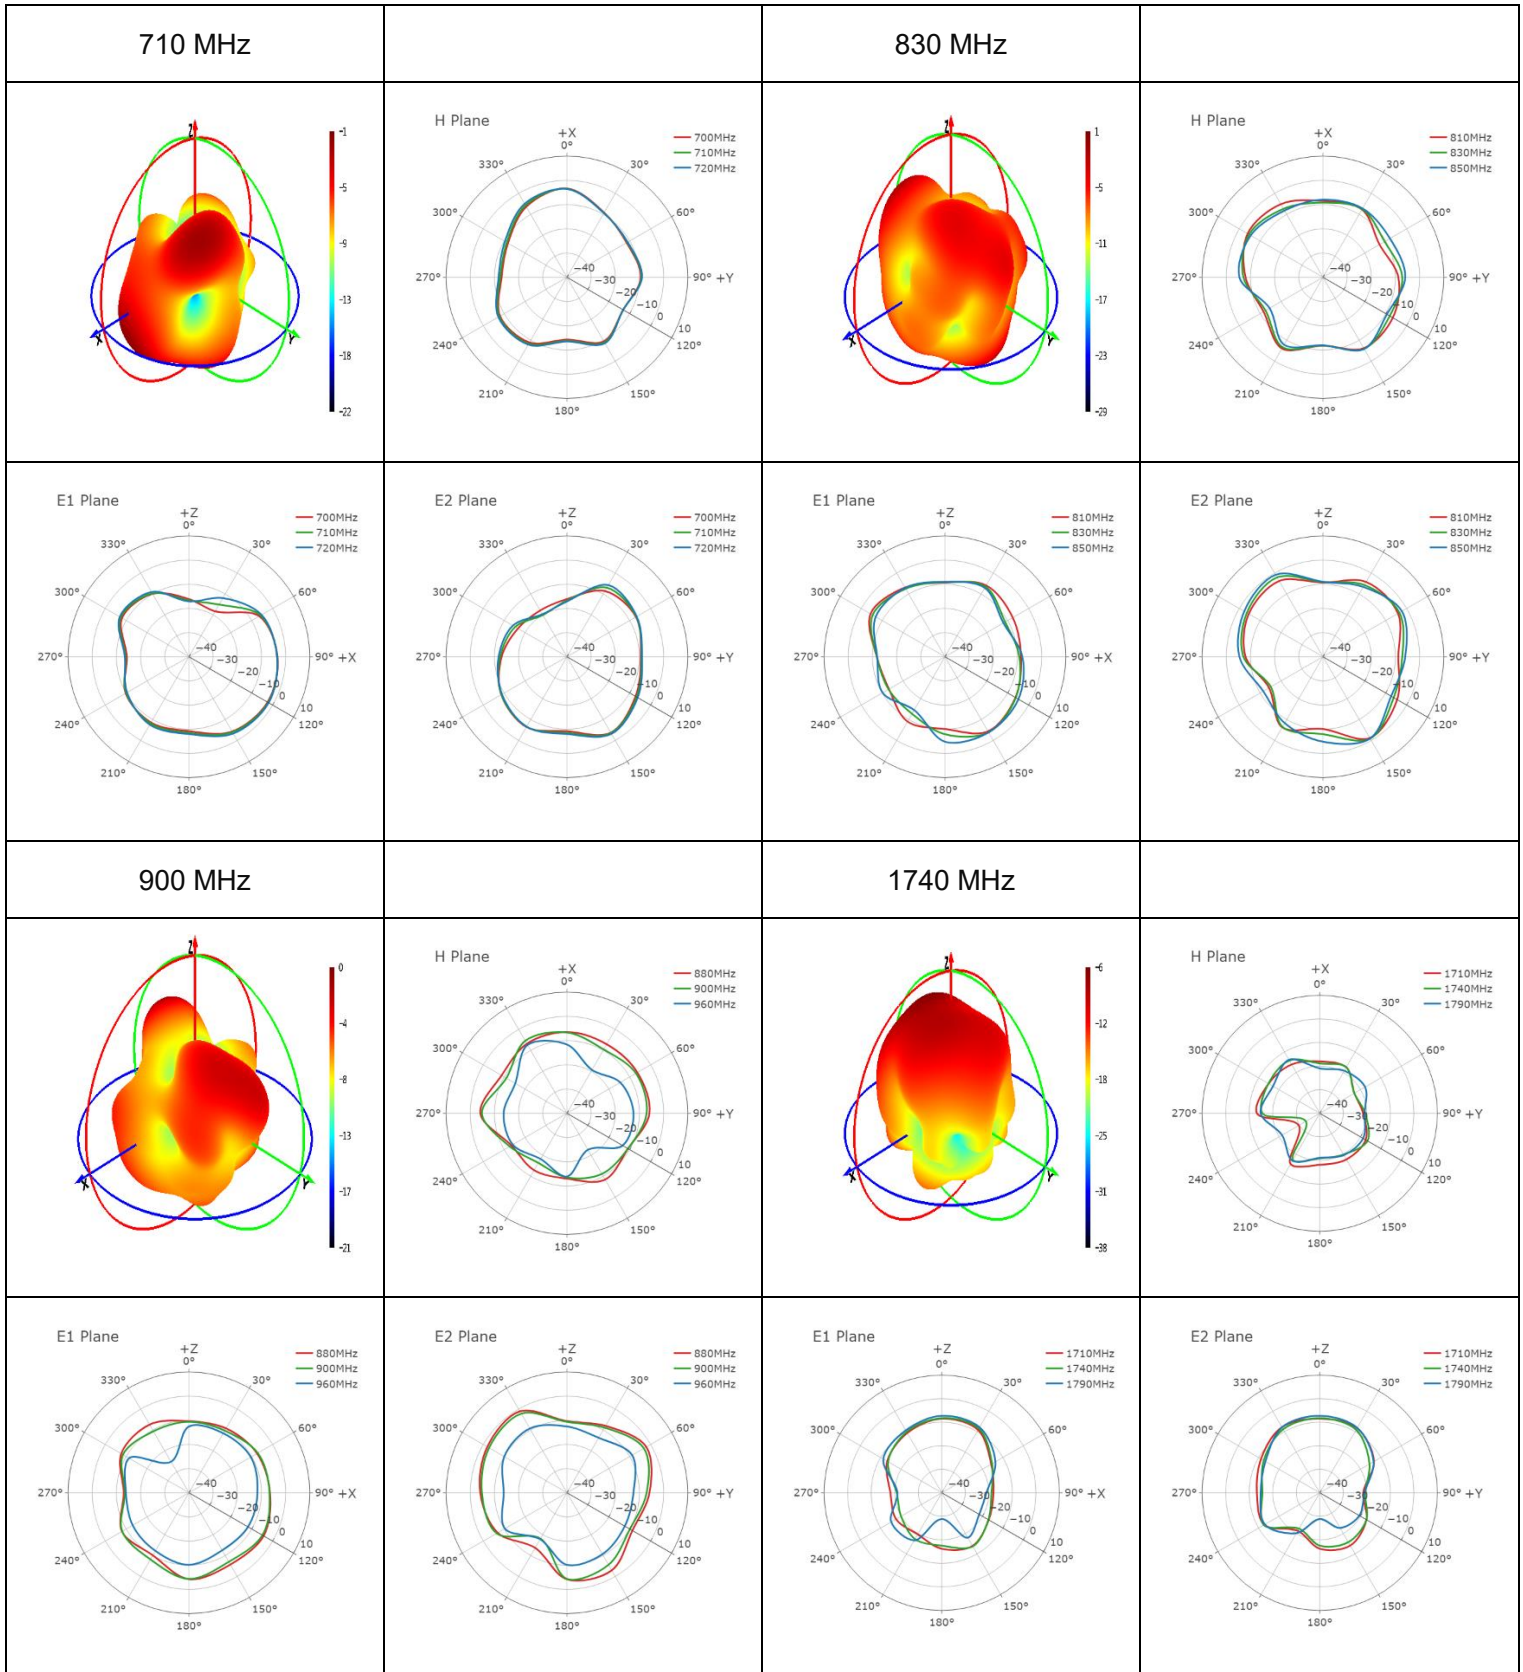


● **4G DIV MP**


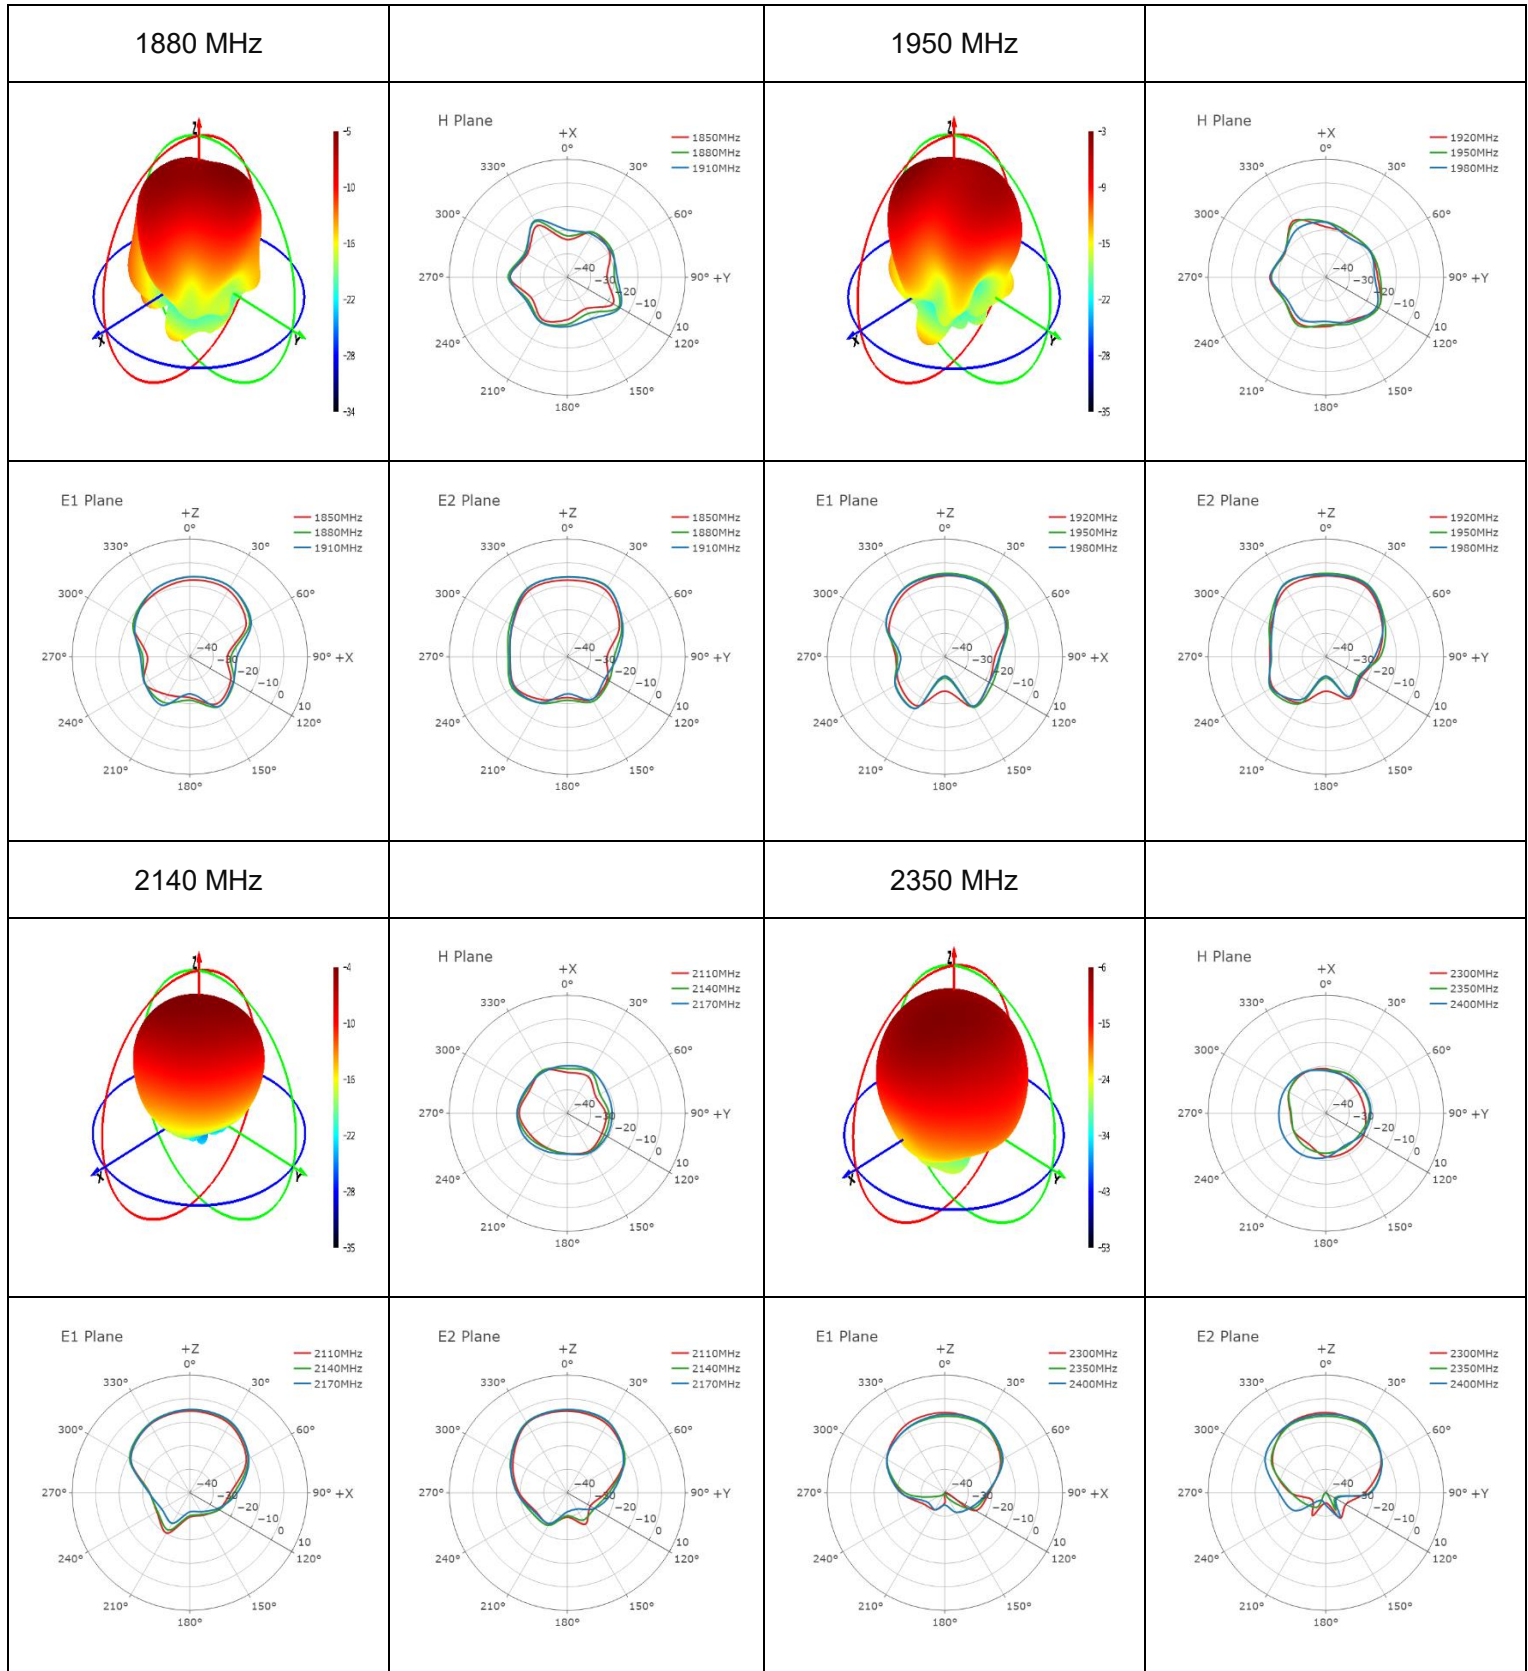


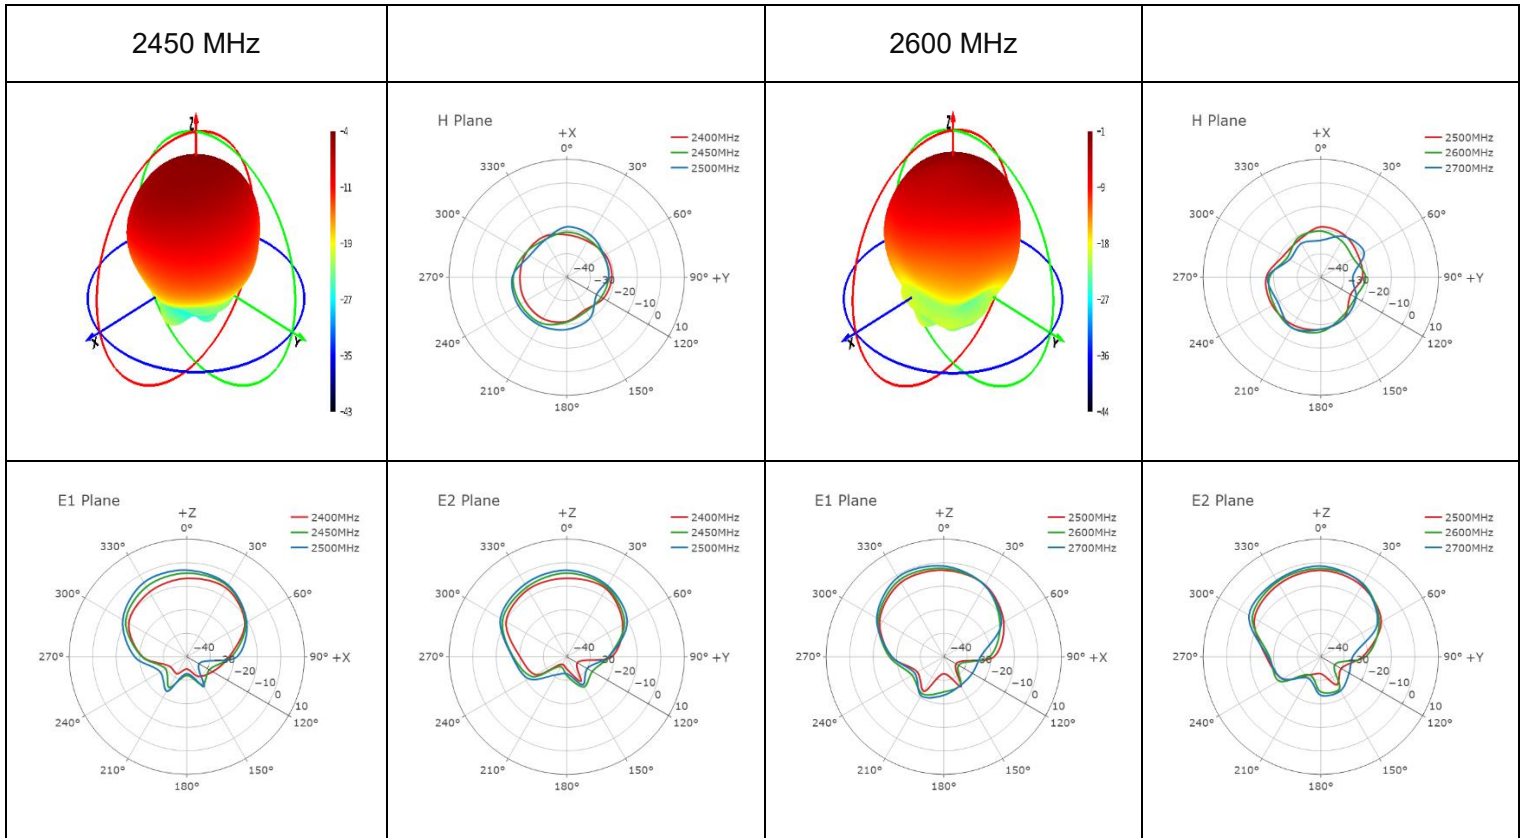



4 Packaging

Step	Packaging Picture / 2D Picture	Description
1		<p>20 pcs antenna products in a PE bag; (20 pcs antennas per PE bag)</p>
2		<p>(3 PE bags per carton box) (60 pcs antennas per carton box)</p> <p><u>Carton Size:</u> <u>L × W × H = 450 × 293 × 185 mm</u></p>
3		<p>Accessories are packaged separately and placed on the top of the product.</p>

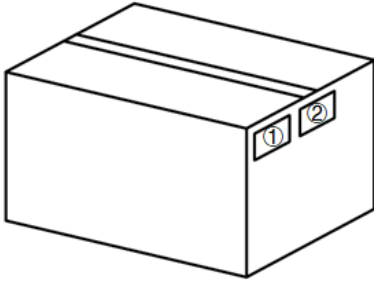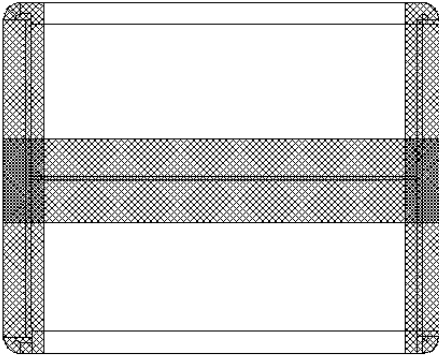4		<p>Position for Attaching Labels</p> <ul style="list-style-type: none">① Carton Label② Quality Label
5		<p>Sealing Cartons</p> <p>“工” type sealing cartons</p>

Contact Us

At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

Tel: +86 21 5108 6236

Email: info@quectel.com

Or our local offices. For more information, please visit:

<http://www.quectel.com/support/sales.htm>.

For technical support, or to report documentation errors, please visit:

<http://www.quectel.com/support/technical.htm>.

Or email us at: support@quectel.com.

Legal Notices

We offer information as a service to you. The provided information is based on your requirements and we make every effort to ensure its quality. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an “as available” basis. We may revise or restate this document from time to time at our sole discretion without any prior notice to you.

Use and Disclosure Restrictions

License Agreements

Documents and information provided by us shall be kept confidential, unless specific permission is granted. They shall not be accessed or used for any purpose except as expressly provided herein.

Copyright

Our and third-party products hereunder may contain copyrighted material. Such copyrighted material shall not be copied, reproduced, distributed, merged, published, translated, or modified without prior written consent. We and the third party have exclusive rights over copyrighted material. No license shall be granted or conveyed under any patents, copyrights, trademarks, or service mark rights. To avoid ambiguities, purchasing in any form cannot be deemed as granting a license other than the normal non-exclusive, royalty-free license to use the material. We reserve the right to take legal action for noncompliance with abovementioned requirements, unauthorized use, or other illegal or malicious use of the material.

Trademarks

Except as otherwise set forth herein, nothing in this document shall be construed as conferring any rights to use any trademark, trade name or name, abbreviation, or counterfeit product thereof owned by Quectel or any third party in advertising, publicity, or other aspects.

Third-Party Rights

This document may refer to hardware, software and/or documentation owned by one or more third parties (“third-party materials”). Use of such third-party materials shall be governed by all restrictions and obligations applicable thereto.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing or usage of trade.

Privacy Policy

To implement module functionality, certain device data are uploaded to Quectel's or third-party's servers, including carriers, chipset suppliers or customer-designated servers. Quectel, strictly abiding by the relevant laws and regulations, shall retain, use, disclose or otherwise process relevant data for the purpose of performing the service only or as permitted by applicable laws. Before data interaction with third parties, please be informed of their privacy and data security policy.

Disclaimer

- a) We acknowledge no liability for any injury or damage arising from the reliance upon the information.
- b) We shall bear no liability resulting from any inaccuracies or omissions, or from the use of the information contained herein.
- c) While we have made every effort to ensure that the functions and features under development are free from errors, it is possible that they could contain errors, inaccuracies, and omissions. Unless otherwise provided by valid agreement, we make no warranties of any kind, either implied or express, and exclude all liability for any loss or damage suffered in connection with the use of features and functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage may have been foreseeable.
- d) We are not responsible for the accessibility, safety, accuracy, availability, legality, or completeness of information, advertising, commercial offers, products, services, and materials on third-party websites and third-party resources.

Copyright © Quectel Wireless Solutions Co., Ltd. 2023. All rights reserved.

Revision History

Version	Date	Author	Note
-	2021-08-10	Aria CHU/ Kenny YIN	Creation of the document
1.0	2021-08-10	Aria CHU/ Kenny YIN	First official release
1.1	2021-12-03	Aria CHU/ Kenny YIN	Updated the product description (Chapter 1).
2.0	2023-06-09	Joyful HUANG/ Lucky FENG/ David LIU/ Aria CHU	Updated all test data and template.
2.1	2023-08-04	Lance SUN	Updated the drawing (Chapter 5).

QUECTEL

www.quectel.com